


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~2GHz
3. VSWR (Max) : 1.2

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.Y.EUN	I.C.KIM	2019.01.15.

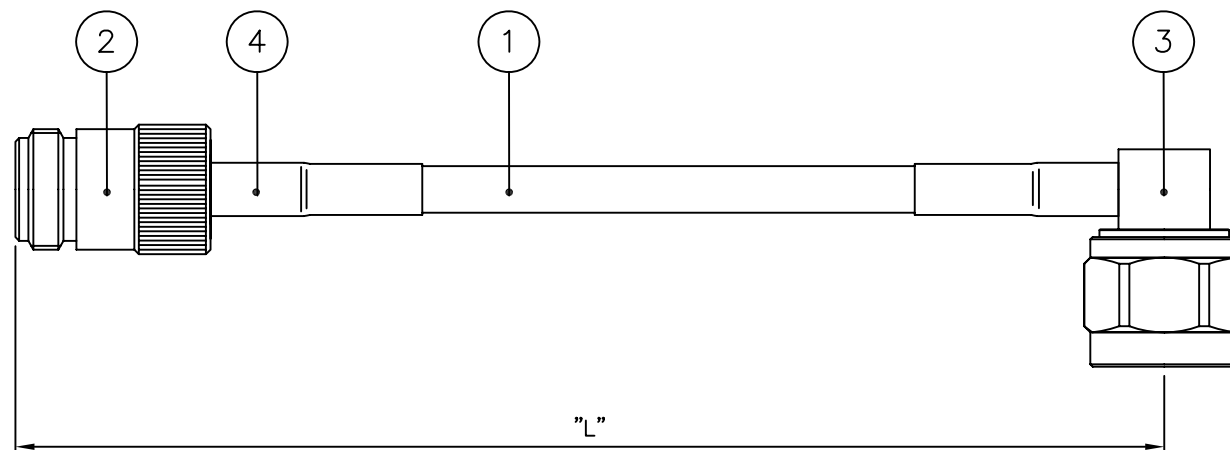

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1. N50 JS-----▶ BODY : Nickel Plating
CONTACT : Gold Plating
2-2. N50 PL-----▶ BODY : Nickel Plating
CONTACT : Gold Plating
COUPLING CAP : Nickel Plating

4	SHRINK TUBE	2	LS TUBE	ATU00263-N/1	φ10-30mm (YELLOW)
3	CONNECTOR	1	KJ COMTECH	CN02918-7/1	N50 PL
2	CONNECTOR	1	KJ COMTECH	CN03698-7/2	N50 JS
1	COAXIAL CABLE		COAX PARK	ACA00072-N/1	LMR300(50Ω) (BLACK)

Center conductor Aluminum Shield Outer Shield Jacket 7.0 11.2 20.5	Center conductor Aluminum Shield Outer Shield Jacket 4.5 13.05 21.35
② CABLE 탈피도	③ CABLE 탈피도

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2019. 01. 15.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	I.C.KIM		 KJ COMTECH CO.,LTD.		
	CHECKED BY					
	DRAWN BY	S.Y.EUN				
CABLE LENGTH TOLERANCE	CHECKED BY			TITLE		
0 ~ 1000mm : +5, -0				CABLE ASS'Y		
1000 ~ 2000mm : +10, -0				A4 DWG NO. CF01293-7/1 DETAIL NO. REVISION I R SHEET 1 of 1		
2000 ~ 3000mm : +15, -0						
3000 ~ 4000mm : +20, -0						
4000 ~ 5000mm : +25, -0	SCALE	UNIT				
5000 ~ : +10%	N/S	mm				