

* ELECTRICAL DATA




1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.35


REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 01. 15.

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N50 JS ----> BODY : Nickel Plating
CONTACT : Gold Plating
 - 2-2. SMA50 PS --> BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

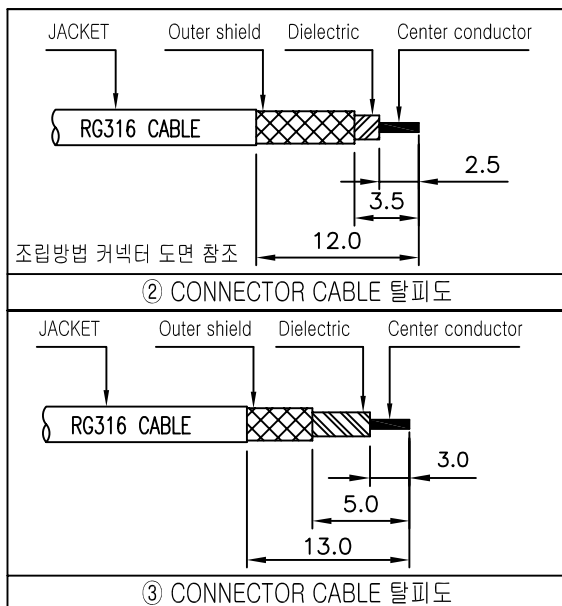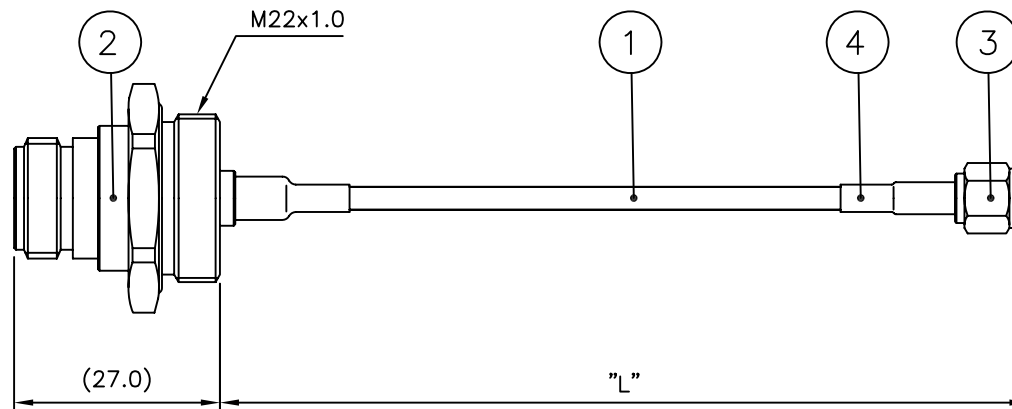

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4_Black
3	CONNECTOR	1	KJ COMTECH	CN00962-7/1	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN03706-7/2	N50 JS
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316(50Ω) (BROWN)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
2019. 01. 15.					
APPROVED BY	I.C.KIM				
CHECKED BY					
TITLE			CABLE ASS'Y		
DRAWN BY	S.Y.EUN	A4			
CHECKED BY					
SCALE	UNIT				
N/S	mm				