


* 케이블 롤단위는 사용전 케이블 양단 1본씩 테스트후 전체적인 사용할것 *

※ Cable 절단, 탈피 후 즉시 Assy할 것
-> 시간 경과 후 Cable Jacket 짧아지는 변형 있음

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 01. 15.

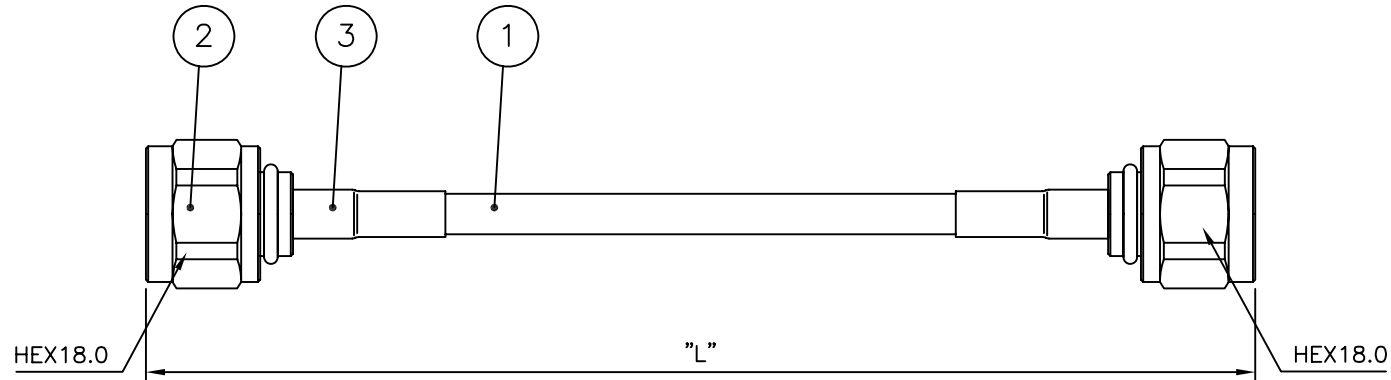

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1. N PS---▶▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

	3	SHRINK TUBE	2	LS TUBE	ATU00216-N/1	ø6-20mm (WHITE)
	2	CONNECTOR	2	KJ COMTECH	CN02561-7/4	N50 PS
	1	COAXIAL CABLE		COAX-PARK 누리텔	ACA00502-N/1	3D-FV (GRAY)
CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2019. 01. 15.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN		TITLE CABLE ASS'Y		
	CHECKED BY					
	SCALE	UNIT	A4			
	N/S	mm				
				DWG NO. CF01304-7/1		
				DETAIL NO.		
				REVISION I R SHEET 1 of 1		