
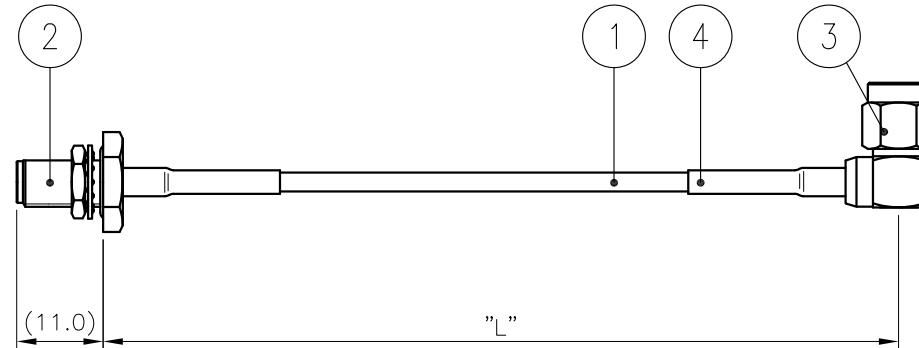


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3.5GHz
3. VSWR (Max) : 1.25


REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	I.C.KIM	2019. 01. 15.

* D-CUTTING 방향 주의 *

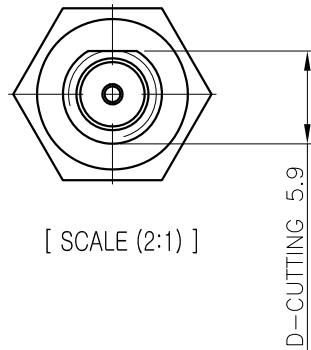

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA JB(F/N)-----▶ BODY : Gold Plating
CONTACT : Gold Plating
NUT/WASHER : Gold Plating
 - 2-2. SMA PL-----▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

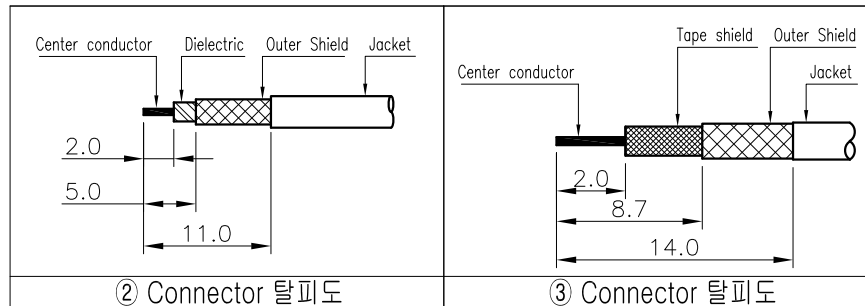

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4-20mm Black
3	CONNECTOR	1	KJ COMTECH	CN02986-7/2	SMA50 PL (금형)
2	CONNECTOR	1	KJ COMTECH	CN01034-7/4	SMA50 JB (F/N)
1	COAXIAL CABLE		EXPANTEL	ACA00185-N/1	SIFS (50Ω)_BLUE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2019. 01. 15.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	I.C.KIM			TITLE CABLE ASS'Y	
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN			A4	
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
				REVISION	I R	SHEET 1 of 1