


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3.5GHz
3. VSWR (Max) : 1.25


REVISION

No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	I.C.KIM	2019. 01. 15.

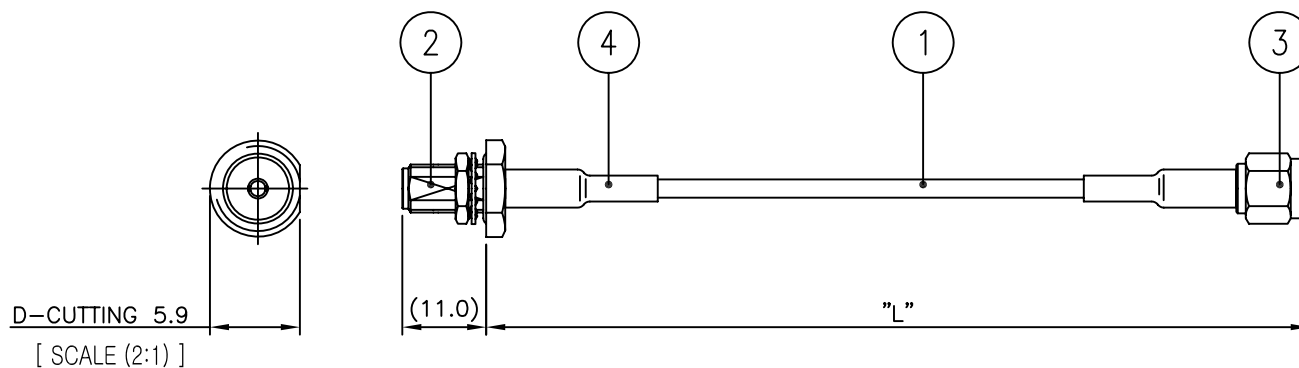

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA JB(F/N)-----▶▶ BODY : Gold Plating
CONTACT : Gold Plating
NUT/WASHER : Gold Plating
 - 2-2. SMA PS-----▶▶ BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

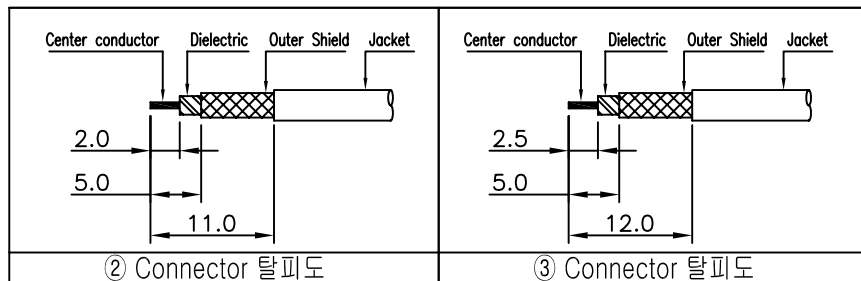

CUSTOMER

CUSTOMER CODE

CABLE LENGTH TOLERANCE

0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	ø4-20mm Black
2	CONNECTOR	1	KJ COMTECH	CN01034-7/4	SMA50 JB (F/N)
2	CONNECTOR	1	KJ COMTECH	CN02869-7/1	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00185-N/1	SIFS (50Ω)_BLUE
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

DATE 2019. 01. 15.

APPROVED BY I.C.KIM

CHECKED BY

DRAWN BY S.Y.EUN

CHECKED BY

SCALE N/S UNIT mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE

CABLE ASS'Y

DWG NO.

CF01315-7/1

DETAIL NO.

REVISION I R

SHEET

1 of 1