

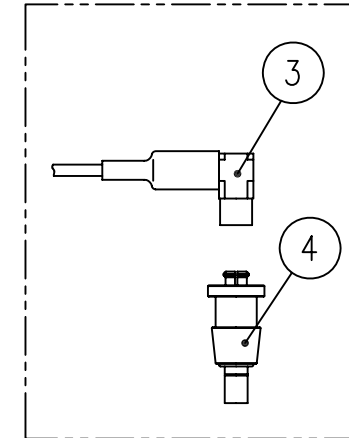



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.01.30.

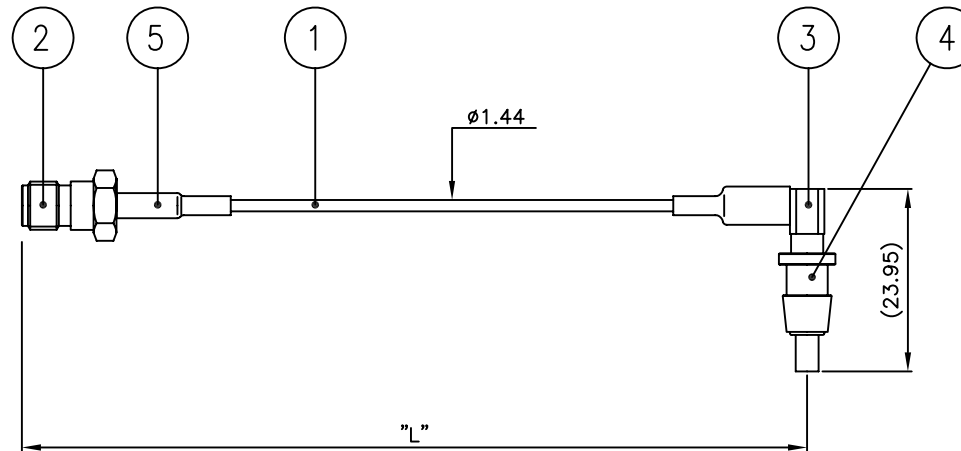

* ③번 커넥터 / ④번 아답타 분리가능

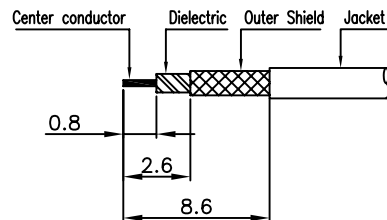

③번 Conn CABLE 탈피도

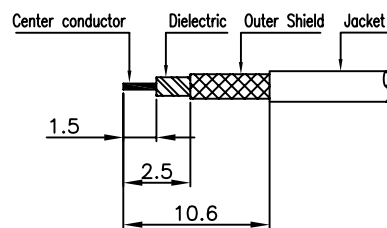

②번 CABLE 탈피도

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. SMA50 JS-----▶ BODY : Gold Plating
CONTACT : Gold Plating
 - 2-2. 1.2T Conn JL ----▶ BODY : Gold Plating
CONTACT : Gold Plating
COVER: Gold Plating

5	BONDING TUBE	2	LS TUBE	ATU00003-N/1	ø3 Black - 15mm
4	ADAPTOR	1	KJ COMTECH	AD00579-7/5	1.2T / KSMP50JS
3	CONNECTOR	1	KJ COMTECH	CN03596-7/2	KSMP50 trans PL
2	CONNECTOR	1	KJ COMTECH	CN02411-7/4	SMA50-JS
1	COAXIAL CABLE	1	NISSEI	ACA00404-N/1	RF-MF507 GRAY

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2019. 01. 30.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY	I.C.KIM					TITLE CABLE ASS'Y
	CHECKED BY						
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN		A4			
	CHECKED BY						
	SCALE	UNIT					
	1/1						
DWG NO.		CF01317-7/1					
DETAIL NO.							
REVISION		I R	SHEET		1 of 1		

CABLE LENGTH TOLERANCE
 0 ~ 1000mm : +5, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 5000mm : +25, -0
 5000 ~ : +10%