

CF01324-7/1



SMA-JS+SMA-JS+
47F(FLAT CABLE)

SMAJS
BO/Ni PI/Go



CF01324-7/1 0.6M

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

0.6M - S11/S22/S21
(SWR, SWR, dB)

■_1.0GHz	- 1.08, 1.08, 0.73
■_2.0GHz	- 1.17, 1.17, 1.09
■_3.0GHz	- 1.12, 1.10, 1.32
■_4.0GHz	- 1.47, 1.46, 1.73
■_5.0GHz	- 1.24, 1.25, 1.84
■_6.0GHz	- 1.72, 1.70, 2.37
■_7.0GHz	- 1.40, 1.50, 2.62
■_8.0GHz	- 4.00, 4.00, 5.96

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)


■ N Male to SMA Male

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

CF01324

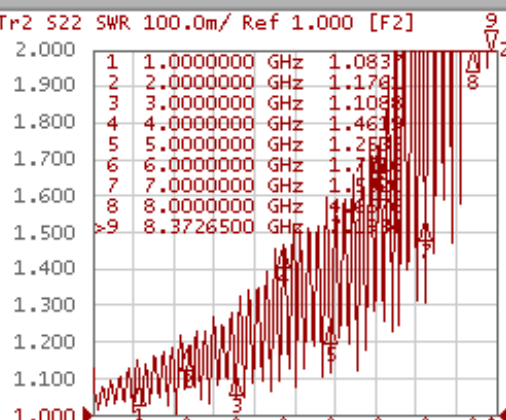

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]



1 Start 10 MHz

IFBW 70 kHz

Stop 8.5 GHz

Cor

Meas

Stop

ExtRef

Ready

Svc

1988-01-01 05:49

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump
Screen Image...

Multiport Test Set
Setup

Misc Setup

Backlight

ON

Firmware
Revision

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)