


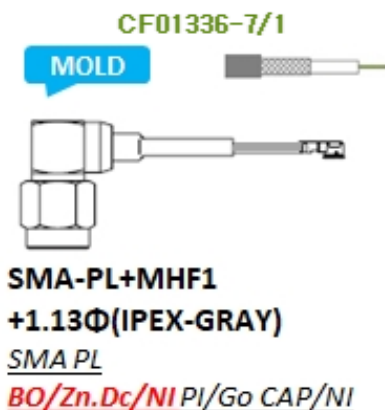

CF01336-7/1 150mm	
Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

150mm S11/S22/S21 (SWR, SWR, dB)	
■_1.0GHz	- 1.11, 1.11, 0.32
■_2.0GHz	- 1.32, 1.29, 0.55
■_3.0GHz	- 1.36, 1.28, 0.71
■_4.0GHz	- 1.68, 1.60, 1.01
■_5.0GHz	- 1.34, 1.24, 0.91
■_6.0GHz	- 1.97, 1.77, 1.35
■_7.0GHz	- 2.00, 1.80, 1.55
■_8.0GHz	- 2.52, 2.45, 2.15

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)


■ N Male to SMA Male

■ SMA (J) SMA (J) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)


AD00006-7/2

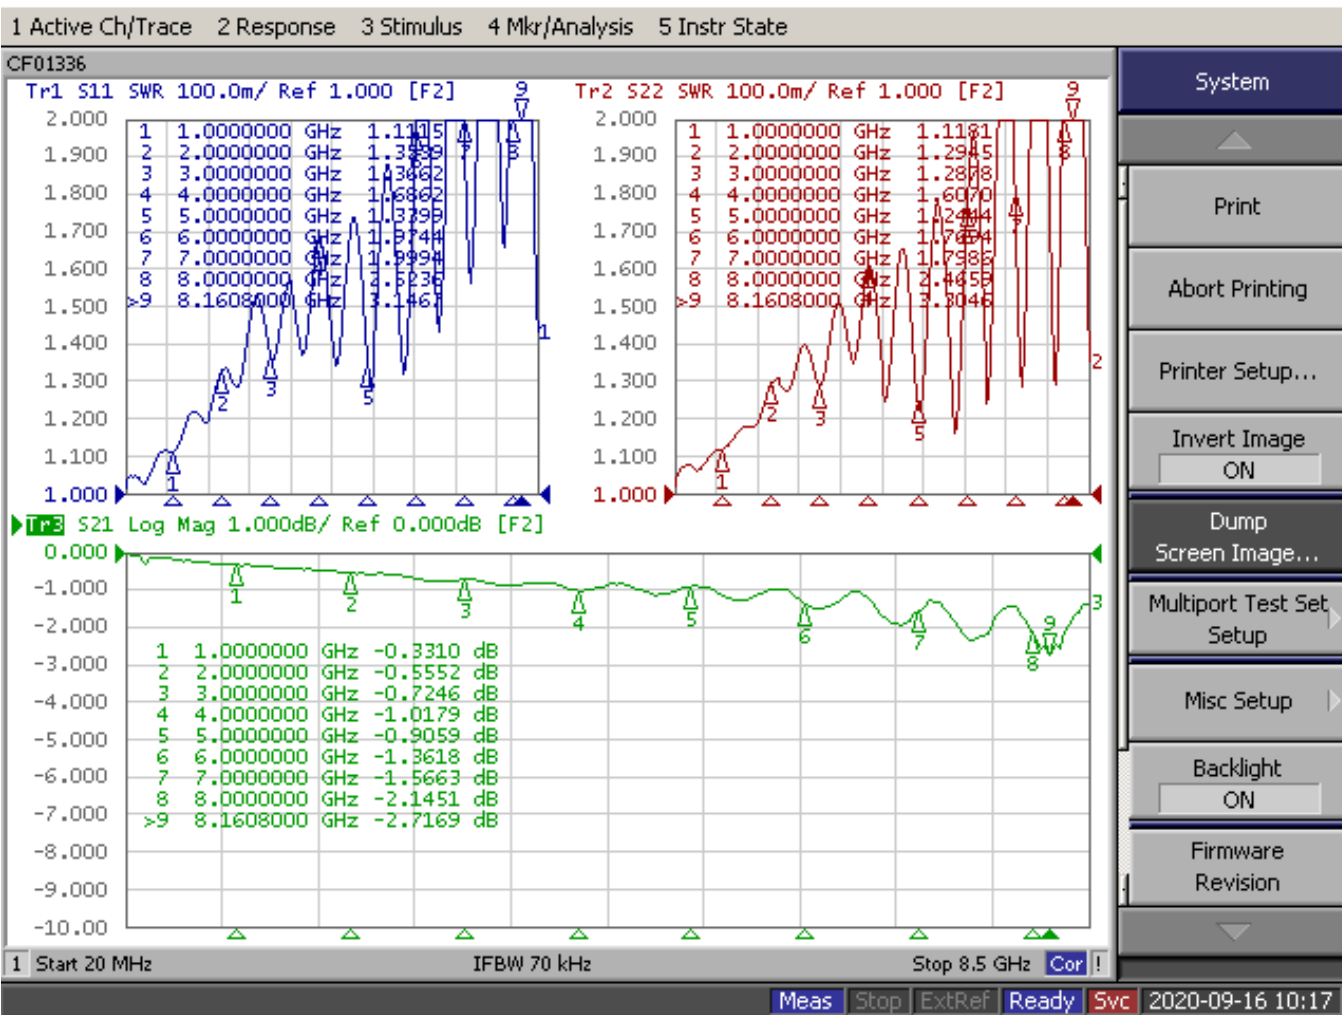

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

CF01336-7/1

MOLD



SMA-PL+MHF1

+1.13Φ(IPEX-GRAY)

SMA PL

BO/Zn.Dc/NI PI/Go CAP/NI

CF01336-7/1 150mm

Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40°C ~ 125°C

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ SMA (J) SMA (J) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

AD00006-7/2

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

