


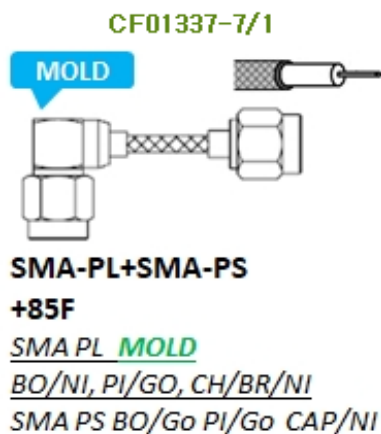

CF01337-7/1 46mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

46mm - S11/S22/S21 (SWR, SWR, dB)

■_1.0GHz	- 1.01, 1.01, 0.12
■_2.0GHz	- 1.06, 1.08, 0.23
■_3.0GHz	- 1.07, 1.05, 0.29
■_4.0GHz	- 1.10, 1.12, 0.31
■_5.0GHz	- 1.16, 1.15, 0.37

■_6.0GHz	- 1.24, 1.23, 0.42
■_7.0GHz	- 1.15, 1.13, 0.42
■_8.0GHz	- 1.36, 1.33, 0.55

► NETWORK ANALYZER

- E5071B (~8.5GHz)
- ZVA50 (~50GHz)

► Test cable

- N Male to SMA Male
10GHz Cable (CF00540-7/1)

► Test Adaptor

- SMA (J) SMA (J) ST
AD00006-7/2

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

