


REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 01. 30.

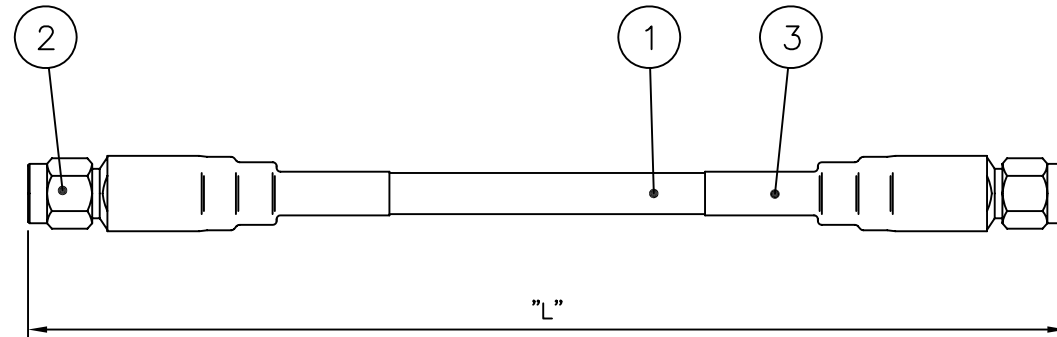


ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. VSWR (Max) : 1.25


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA50 PS----▶ BODY : Nickel Plating
 - CONTACT : Gold Plating
 - CAP : SUS Plating


*결합도 2PAGE 참조

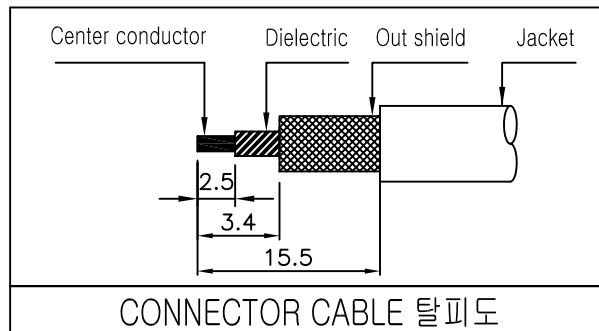

3	SHRINK TUBE	2	LS TUBE	ATU00068-N/1	Ø10-60mm-BLACK
2	CONNECTOR	2	KJ COMTECH	CN02764-7/8	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00040-N/1	141FJ(50Ω)-BLUE
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2019. 01. 30.		
CUSTOMER CODE			APPROVED BY I.C.KIM		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 1000mm : +5, -0			DRAWN BY S.Y.EUN		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE		
3000 ~ 4000mm : +20, -0			UNIT mm		
4000 ~ 5000mm : +25, -0			N/S		
5000 ~ : +10%			TITLE		
			CABLE ASS'Y		
			DWG NO. CF01340-7/1		
			DETAIL NO.		
			REVISION I R		
			SHEET 1 of 1		

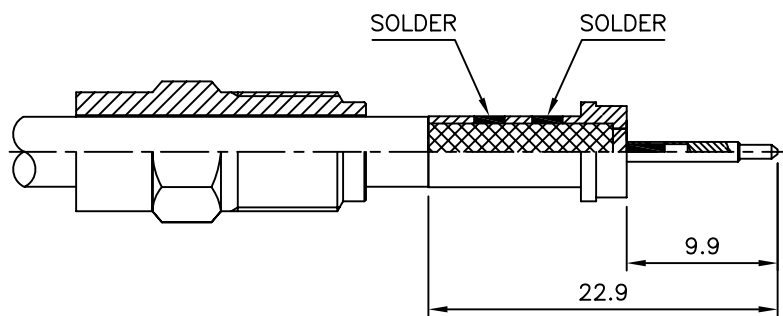

+

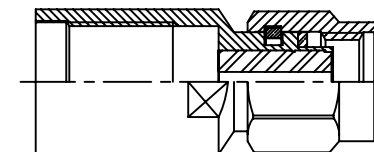

*조립방법

1. CABLE에 CLAMP를 체결 후 PIN과 납땜작업 한다.
2. 1번 조립품에 INSERT를 결합한 후 납땜작업을 한다. *과납주의
3. 2번 조립품과 BODY 조립체를 결합 후 CLAMP와 BODY의 SCREW를 조립한다.