


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 830MHz ~ 2150MHz
3. VSWR : 1.25(Max)

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 01. 30.


※ Cable 절단, 탈피 후 즉시 Assy할 것
-> 시간 경과 후 Cable Jacket 짧아지는 변형 있음

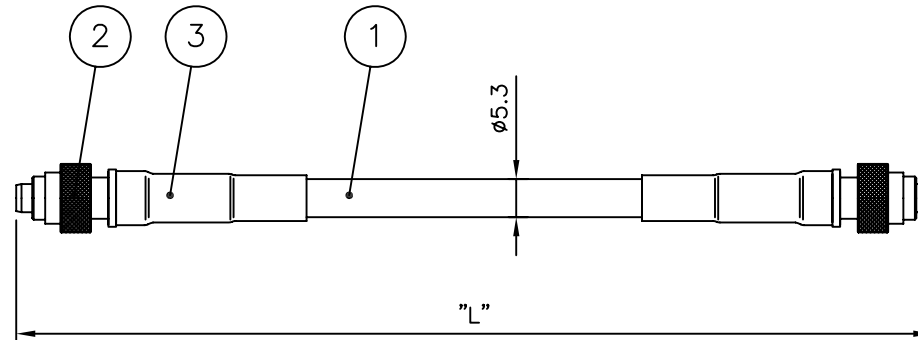

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMDL PS----▶ BODY : Nickel Plating
 - CONTACT : Gold Plating
 - CAP : Nickel Plating

- ※ 작업 시 수축튜브 위치 주의
- ※ 알루미늄 Tape 넣어서 작업할 것
- ※ Cable 색상 PANTONE or DIC 컬러북 참조할 것
- PANTONE : Cool Gray IC
 - DIC : 583

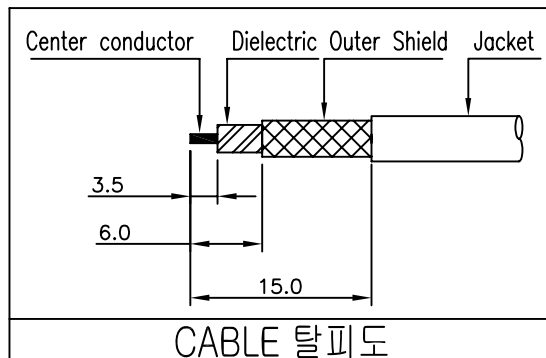

3	BONDING TUBE	2	LS TUBE	ATU00006-N/1	φ6-25 (BLACK)
2	CONNECTOR	2	KJ COMTECH	CN03755-7/2	SMDL50 PS
1	COAXIAL CABLE		COAX PARK	ACA00491-N/1	3D-FV (Cool Gray IC)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2019. 01. 30.		
CUSTOMER CODE			APPROVED BY I.C.KIM		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 1000mm : +5, -0			DRAWN BY S.Y.EUN		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE		
3000 ~ 4000mm : +20, -0			UNIT		
4000 ~ 5000mm : +25, -0			N/S		
5000 ~ : +10%			mm		
			TITLE		
			CABLE ASS'Y		
			DWG NO.		
			CF01350-7/1		
			DETAIL NO.		
			REVISION		
			I R		
			SHEET		
			1 of 1		