



1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3.5GHz
3. VSWR (Max) : 1.25

REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	I.C.KIM	2019. 01. 15.

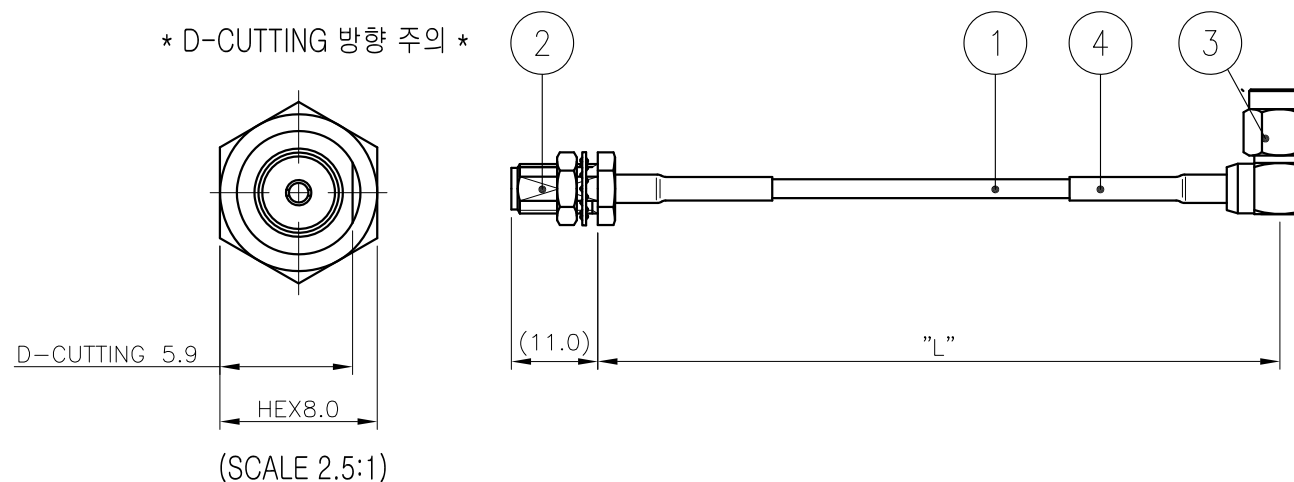

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA JB(F/N)----▶▷BODY : Gold Plating
CONTACT : Gold Plating
NUT/WASHER : Gold Plating
 - 2-2. SMA PL-----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

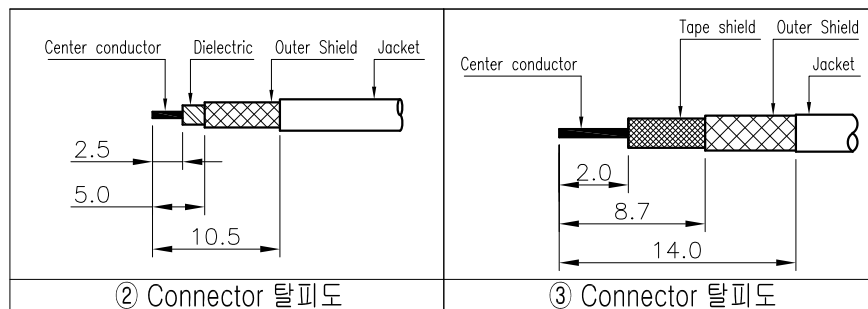

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4-20mm Black
3	CONNECTOR	1	KJ COMTECH	CN02986-7/2	SMA50 PL (금형)
2	CONNECTOR	1	KJ COMTECH	CN02939-7/3	SMA50 JB (F/N)
1	COAXIAL CABLE		EXPANTEL	ACA00185-N/1	SIFS (50Ω) BLUE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE2019. 01. 15.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8011 KJ COMTECH CO.,LTD. TITLE			
CUSTOMER CODE	APPROVED BY	I.C.KIM			CABLE ASS'Y		
	CHECKED BY						
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN			A4		
	CHECKED BY						
	SCALE	UNIT		A4		DWG NO.	CF01354-7/1
	N/S	mm				DETAIL NO.	
			REVISION	I R	SHEET	1 of 1	