
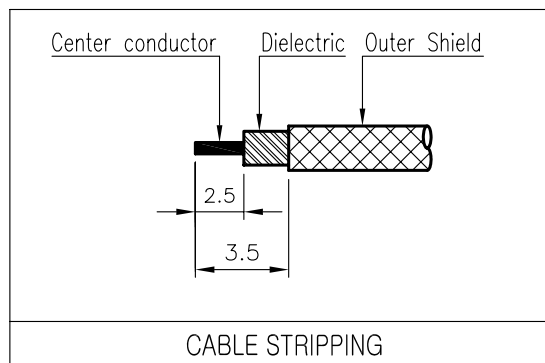


| REVISION |                      |         |         |               |
|----------|----------------------|---------|---------|---------------|
| REV      | DESCRIPTION          | DRAWN   | APPR    | DATE          |
| IR       | Initial Registration | S.Y.EUN | I.C.KIM | 2019. 03. 05. |
|          |                      |         |         |               |

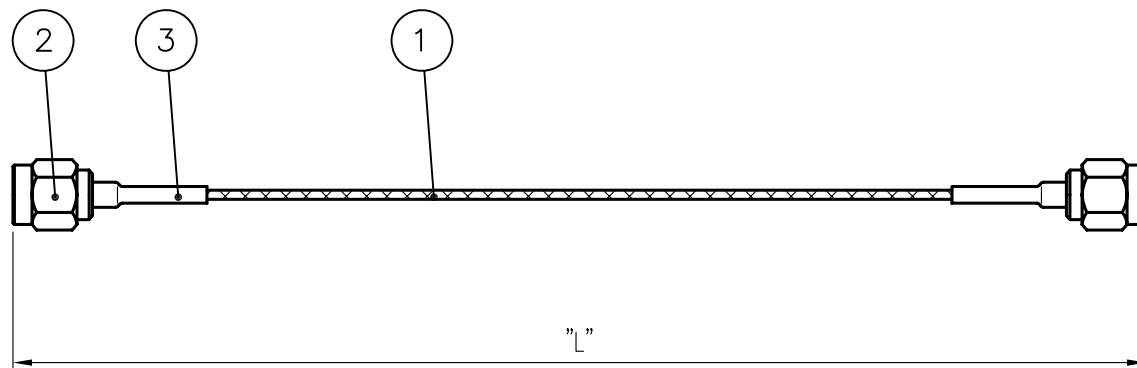

# Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
  - 2-1. SMA50 PS----->▷BODY : Gold Plating  
CONTACT : Gold Plating  
CAP : Nickel Plating

|   |               |   |            |              |                 |
|---|---------------|---|------------|--------------|-----------------|
| 3 | BONDING TUBE  | 2 | KJ COMTECH | ATU00003-N/1 | ø3-15mm (BLACK) |
| 2 | CONNECTOR     | 2 | KJ COMTECH | CN03343-7/2  | SMA-PS          |
| 1 | COAXIAL CABLE | 1 | EXPANTEL   | ACA00025-N/1 | 047F (50Ω)      |

|                                |             |               |                                                                                       |                                                                                                                                                                                                                                   |          |         |
|--------------------------------|-------------|---------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|
| CUSTOMER                       | NO.         | DESCRIPTION   | Q'TY                                                                                  | VENDER                                                                                                                                                                                                                            | PART NO. | RAMARKS |
|                                | DATE        | 2019. 03. 05. |                                                                                       | <div><div><br/>KJ COMTECH CO.,LTD.</div><div>RF &amp; MICROWAVE<br/>TECHNOLOGY<br/>Tel : 82-32-347-8015<br/>Fax : 82-32-347-8017</div></div> |          |         |
| CUSTOMER CODE                  | APPROVED BY | I.C.KIM       |                                                                                       | <div><div>A4</div><div><div>DWG NO.</div><div>CF01356-7/1</div></div><div><div>DETAIL NO.</div><div></div></div><div><div>REVISION</div><div>I R</div><div>SHEET</div><div>1 of 1</div></div></div>                               |          |         |
|                                | CHECKED BY  |               |                                                                                       |                                                                                                                                                                                                                                   |          |         |
|                                | DRAWN BY    | S.Y.EUN       |                                                                                       |                                                                                                                                                                                                                                   |          |         |
| CABLE LENGTH TOLERANCE         | CHECKED BY  |               |                                                                                       |                                                                                                                                                                                                                                   |          |         |
| 0 ~ 50mm : +0.5 ~ -0.5         | SCALE       | UNIT          |  |                                                                                                                                                                                                                                   |          |         |
| 50 ~ 200mm : +1.0 ~ -1.0       | N/S         | mm            |                                                                                       |                                                                                                                                                                                                                                   |          |         |
| 100 ~ 500mm : +2.0 ~ -2.0      |             |               |                                                                                       |                                                                                                                                                                                                                                   |          |         |
| 200 ~ 500mm : +3.0 ~ -3.0      |             |               |                                                                                       |                                                                                                                                                                                                                                   |          |         |
| Bending Angles : -1.0° ~ -3.0° |             |               |                                                                                       |                                                                                                                                                                                                                                   |          |         |