



REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 05. 15.

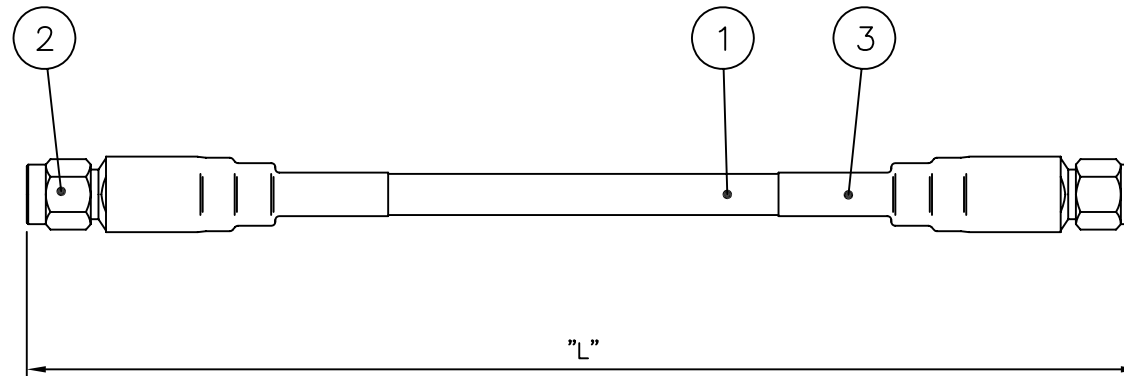

ELECTRICAL DATA

1. IMPEDANCE : 50ohm (Nominal)
2. Frequency Range : DC~18GHz
3. VSWR(Max) : 1.25

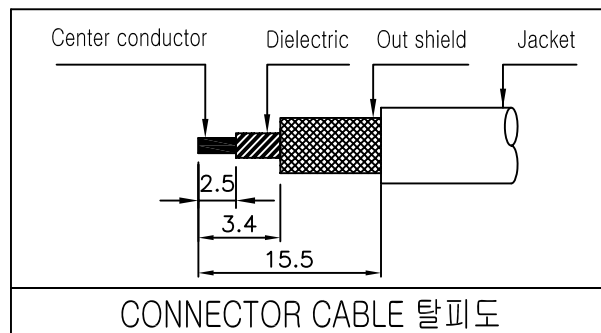

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA50 PS---▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : SUS Plating


*결합도 2PAGE 참조

3	SHRINK TUBE	2	LS TUBE	ATU00068-N/1	Ø10-60mm-BLACK
2	CONNECTOR	2	KJ COMTECH	CN02764-7/8	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Q)-BLUE
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2019. 05. 15.		
CUSTOMER CODE			APPROVED BY I.C.KIM		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 1000mm : +5, -0			DRAWN BY S.Y.EUN		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE		
3000 ~ 4000mm : +20, -0			UNIT		
4000 ~ 5000mm : +25, -0			N/S		
5000 ~ : +10%			mm		
			A4		
			DWG NO.		
			CF01362-7/1		
			DETAIL NO.		
			REVISION		
			I R		
			SHEET		
			1 of 1		


CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	
0 ~ 1000mm : +5, -0	
1000 ~ 2000mm : +10, -0	
2000 ~ 3000mm : +15, -0	
3000 ~ 4000mm : +20, -0	
4000 ~ 5000mm : +25, -0	
5000 ~ : +10%	



TITLE
CABLE ASS'Y

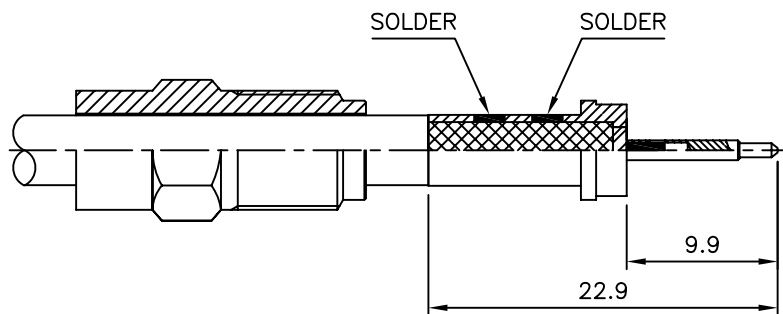

+

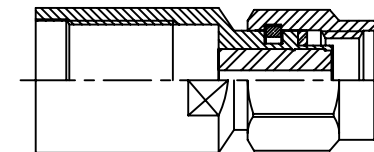

*조립방법

1. CABLE에 CLAMP를 체결 후 PIN과 납땜작업 한다.
2. 1번 조립품에 INSERT를 결합한 후 납땜작업을 한다. *과납주의
3. 2번 조립품과 BODY 조립체를 결합 후 CLAMP와 BODY의 SCREW를 조립한다.