



CF01363-7/1 1M	
Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40℃ ~ 125℃

1M - S11/S22/S21 (SWR, SWR, dB)	
■_2GHz	- 1.02, 1.02, 0.61
■_4GHz	- 1.00, 1.00, 0.92
■_6GHz	- 1.05, 1.05, 1.15
■_8GHz	- 1.03, 1.06, 1.42
■10GHz	- 1.04, 1.05, 1.54


■12GHz	- 1.20, 1.20, 1.80
■14GHz	- 1.21, 1.21, 2.04
■16GHz	- 1.20, 1.21, 2.08
■18GHz	- 1.26, 1.31, 2.40

- ▶ NETWORK ANALYZER
- ▶ Test cable
- ▶ Test Adaptor
- ☐ E5071B (~8.5GHz)

☒ ZVA50 (~50GHz)
- ☒ 2.4mm Male to 2.4mm Male 50GHz Cable
- ☒ 2.4mm (J) to 2.92mm (P) AD00646-7/2

☒ N (J) SMA (J) AD00424-7/1

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

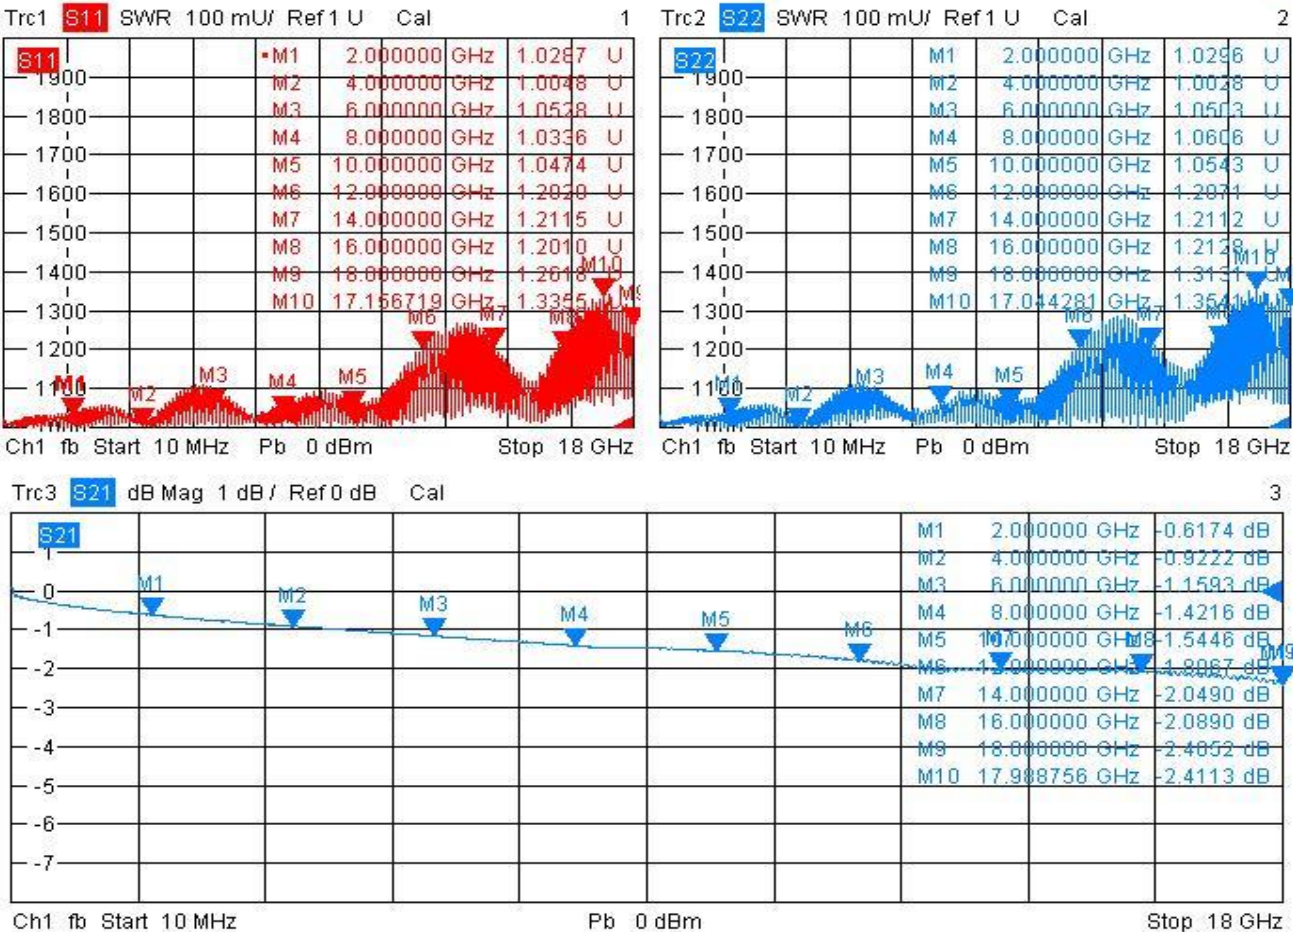

6/26/2019, 7:15 PM