



Technical drawing of a cable assembly. The assembly consists of a cable (1) connected to a connector (2) on the left and a connector (3) on the right. The cable is labeled with a dimension 'L' indicating its length. The connector (2) is shown in a cross-section view, revealing internal components (4). A dimension of 18.7 is indicated for the length of the connector (2).



2-1. F50 JB (F/N) ----▶▷ BODY : Nickel Plating
CONTACT : Gold Plating

2-2. SMA50 PS -----▶▷ BODY : Gold Plating
CONTACT : Gold Plating
CAP : Gold Plating

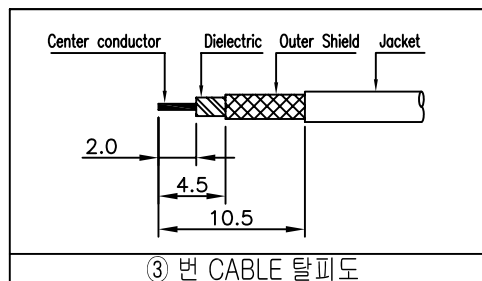

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	φ4-20 (BLACK)
3	CONNECTOR	1	KJ COMTECH	CN00962-7/4	SMA50 PS
2	CONNECTOR	1	성진정보통신	CN03672-N/1	F50 JB (F/N)
1	COAXIAL CABLE		KJ COMTECH	ACA00048-N/1	RG316 (50Ω) (BROWN)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2019. 05. 21.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	CUSTOMER CODE	APPROVED BY	I.C.KIM			
		CHECKED BY				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY		S.Y.EUN		TITLE CABLE ASS'Y	
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
A4				DWG NO.	CF01364-7/1	
				DETAIL NO.		
				REVISION	I R	SHEET 1 of 1