


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR : 1.25(Max)
4. INSERTION LOSS : 1.0dB(Max)

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.05.02.

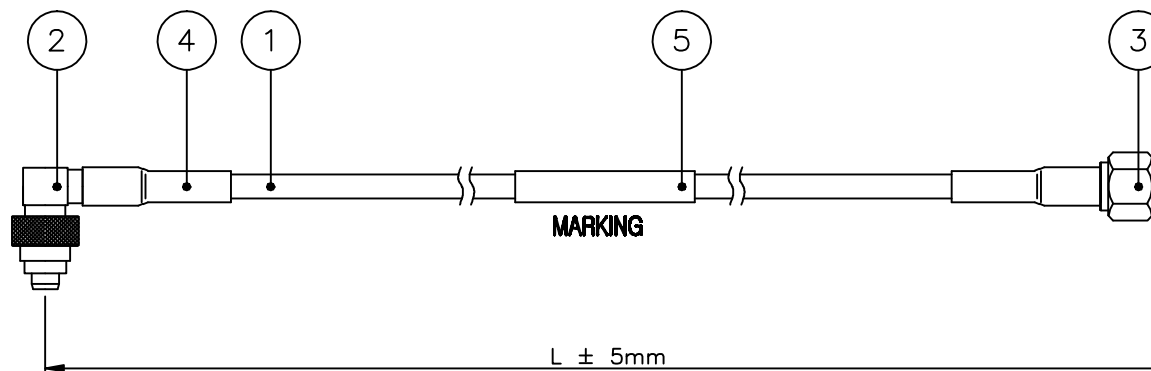



Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

- 2-1. SMD PL → BODY : Nickel Plating
CONTACT : Gold Plating
CAP: Nickel Plating
- 2-2. SMA PS → BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

MARKING

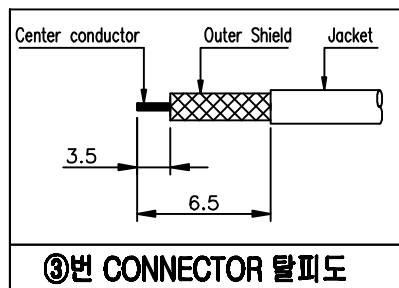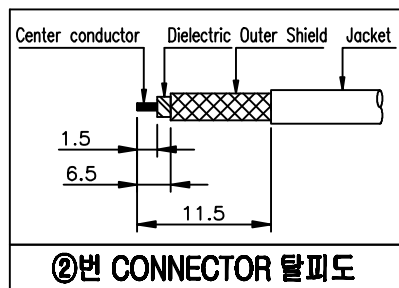

5	MARKING TUBE	1	LS TUBE	ATU00212-N/1	Ø4-20 White
4	BONDING TUBE	2	LS TUBE	ATU00004-N/1	Ø4-20 Black
3	CONNECTOR	1	KJ COMTECH	CN02796-7/2	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN02825-7/2	SMD50 PL
1	COAXIAL CABLE		EXPANTEL	ACA00043-N/1	85MF(50Q) - BULE (± CABLE 길이 390mm)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2019. 05. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017		
	CUSTOMER CODE	APPROVED BY	I.C.KIM			
	CABLE LENGTH TOLERANCE		CHECKED BY	TITLE		
0 ~ 1000mm : +5, -0		DRAWN BY		CABLE ASS'Y		
1000 ~ 2000mm : +10, -0		CHECKED BY		DWG NO.		
2000 ~ 3000mm : +15, -0		SCALE		DETAIL NO.		
3000 ~ 4000mm : +20, -0		UNIT		REVISION		
4000 ~ 5000mm : +25, -0		mm		I R		
5000 ~ : +10%		N/S		SHEET		

A4

1 of 1