



REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 05. 02.
1	고객사 요청으로 인한 케이블 형상 변경	S.Y.EUN	I.C.KIM	2019. 05. 28.


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR : 1.25(Max)
4. INSERTION LOSS : 1.0dB(Max)

2-M2.6-TAP

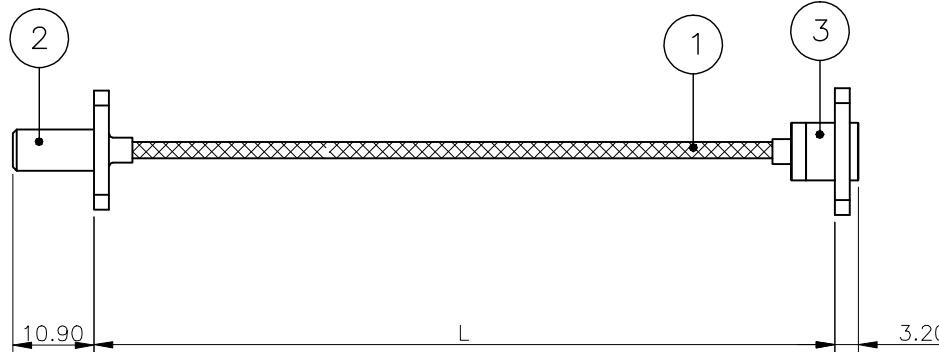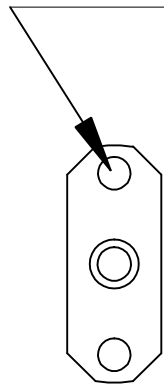

2-M2.6x0.45

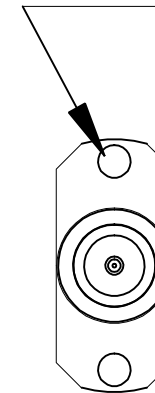

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. PDM50 JS-2H ----> BODY : Nickel Plating
CONTACT : Gold Plating
 - 2-2. PDM50 PS-2H ----> BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

3	CONNECTOR	1	KJ COMTECH	CN03386-7/2	PDM50 PS-2H
2	CONNECTOR	1	KJ COMTECH	CN02248-7/1	PDM50 JS-2H
1	COAXIAL CABLE		EXPANTEL	ACA00027-N/1	85F (50Ω)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS

DATE 2019. 05. 28.



RF & MICROWAVE
TECHNOLOGY
Tel : 02-02-047-0015
Fax : 02-02-047-0017

TITLE CABLE ASS'Y

DWG NO. CF01378-7/1

DETAIL NO.

REVISION 1 SHEET 1 of 1

CUSTOMER
솔리드

CUSTOMER CODE
ALPS-SIU-R02

CABLE LENGTH TOLERANCE
0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%


APPROVED BY I.C.KIM

CHECKED BY


DRAWN BY S.Y.EUN

CHECKED BY


SCALE N/S UNIT mm



A4

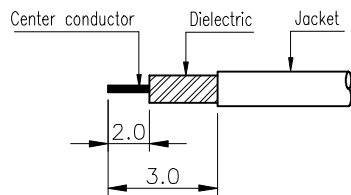

②번 CONNECTOR 탈피도

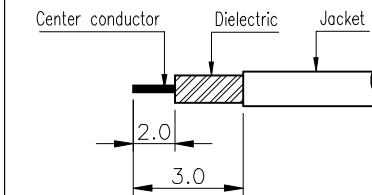

③번 CONNECTOR 탈피도