


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR : 1.25(Max)
4. INSERTION LOSS : 1.0dB(Max)



REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 05. 02.

2-M2.6-TAP

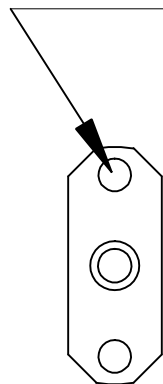

2-M2.6-TAP

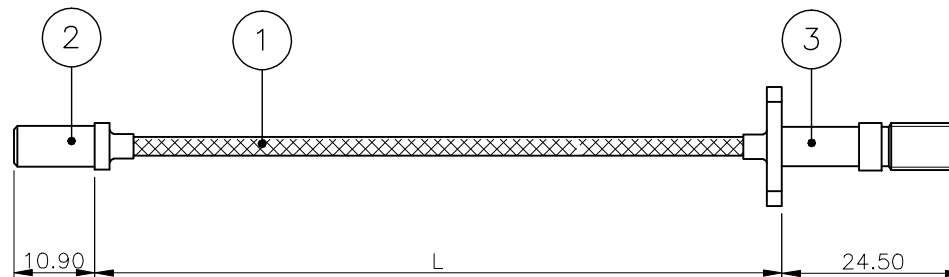



Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. PDM50 JS-2H ----> BODY : Nickel Plating
CONTACT : Gold Plating
 - 2-2. SMA50 JS-2H ----> BODY : Gold Plating
CONTACT : Gold Plating

3	CONNECTOR	1	KJ COMTECH	CN02536-7/1	SMA50 JS-2H
2	CONNECTOR	1	KJ COMTECH	CN02248-7/1	PDM50 JS-2H
1	COAXIAL CABLE		EXPANTEL	ACA00027-N/1	85F (50Ω)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

DATE		2019. 05. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 82-02-047-0015 Fax : 82-02-047-0017
APPROVED BY	I.C.KIM			

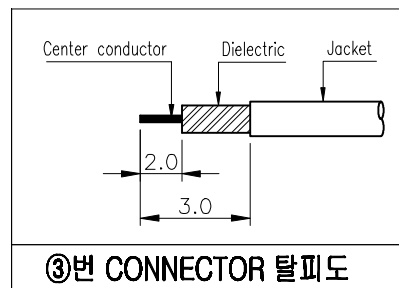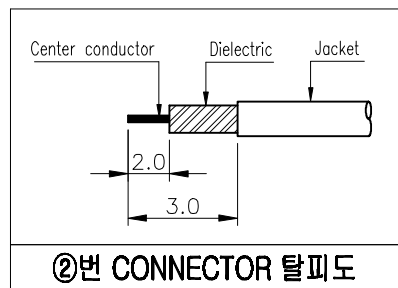

CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	
0 ~ 1000mm : +5, -0	
1000 ~ 2000mm : +10, -0	
2000 ~ 3000mm : +15, -0	
3000 ~ 4000mm : +20, -0	
4000 ~ 5000mm : +25, -0	
5000 ~ : +10%	

DATE		2019. 05. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 82-02-047-0015 Fax : 82-02-047-0017 KJ COMTECH CO.,LTD.	
APPROVED BY		I.C.KIM			
CHECKED BY					
DRAWN BY		S.Y.EUN			
CHECKED BY					
SCALE		UNIT		TITLE	
N/S		mm			
				A4	
				DWG NO.	
				DETAIL NO.	
				REVISION	
				I R	
				SHEET	
				1 of 1	