



CF01385-7/3

Frequency	~40GHz
VSWR	1.35 : 1 (Max.)
Impedance	■ 50Ω □ 75Ω
Length(mm)	L : 1000
Temperature	-40°C ~ 125°C

*1M - S11,S22,S21 (dB)

■ 1GHz/	1.03, 1.03, 0.39
■ 5GHz/	1.04, 1.03, 0.94
■ 10GHz/	1.07, 1.08, 1.40
■ 15GHz/	1.06, 1.08, 1.74
■ 20GHz/	1.16, 1.20, 2.03
■ 25GHz/	1.19, 1.19, 2.27
■ 30GHz/	1.10, 1.11, 2.49
■ 35GHz/	1.21, 1.20, 2.77
■ 40GHz/	1.06, 1.20, 2.98
■ Max/	1.26, 1.30, 3.04

▶ NETWORK ANALYZER

- ☐ E5071B (~8.5GHz)
- ☒ ZVA50 (~50GHz)


▶ Test cable

- ☐ N Male to SMA Male
10GHz Cable (CF00540-7/1)
- ☐ N Male to N Male
10GHz Cable (CF00539-7/1)
- ☒ 2.4mm Female to 2.4mm Male
50GHz Cable (CF01252-7/1)

▶ Test Adaptor

- ☒ 2.4mm Female to 2.92mm Male
(KJ Code : AD00646-7/2_ / 2ea)
- ☒ 2.92mm Female to 2.92mm Female
(KJ Code : AD00644-7/2_ / 2ea)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3 : Insertion Loss (S21)

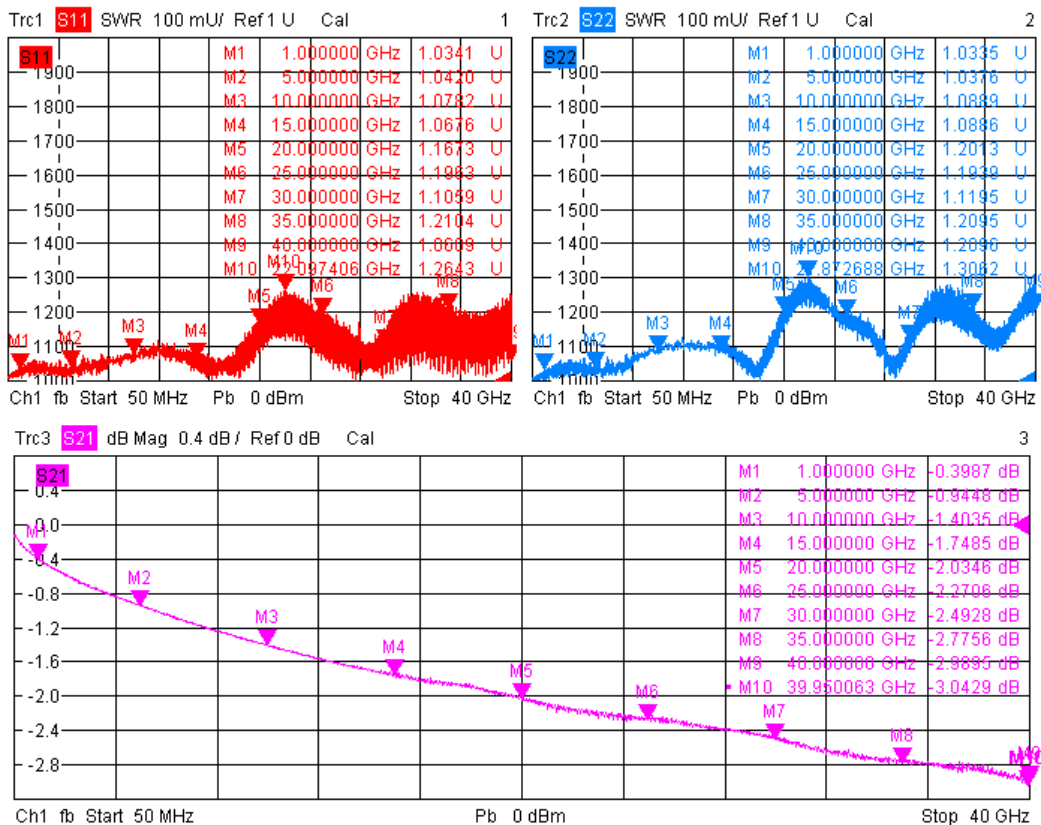

11/15/2019, 4:26 PM