


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.Y.EJUN	I.C.KIM	2019.08.27.


ELECTRICAL DATA * 케이블 작업 후 소용기내 측정

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) :
4. INSERTION LOSS(Max) :

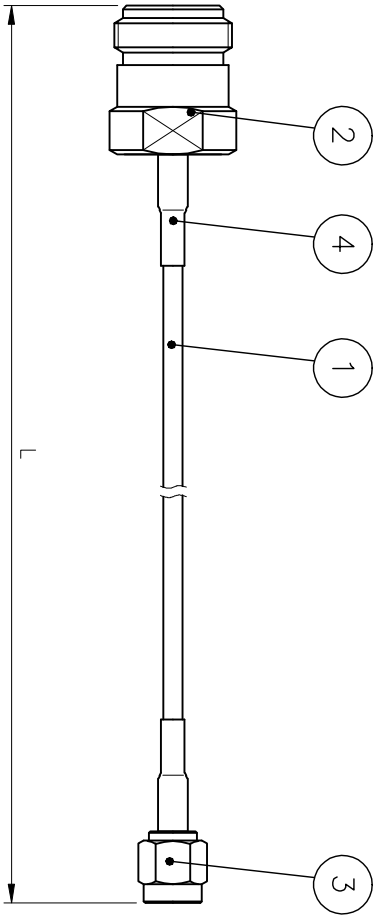

Notes

1. RoHS & Pb-FREE
 2. CONNECTOR FINISHES
 - 2-1. N JS----> BODY : Nickel Plating
 - 2-2. SMA PS----> BODY : Gold Plating
- CONTACT : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
- * 작업시 편높이 지그 사용하여 ASSY할 것.

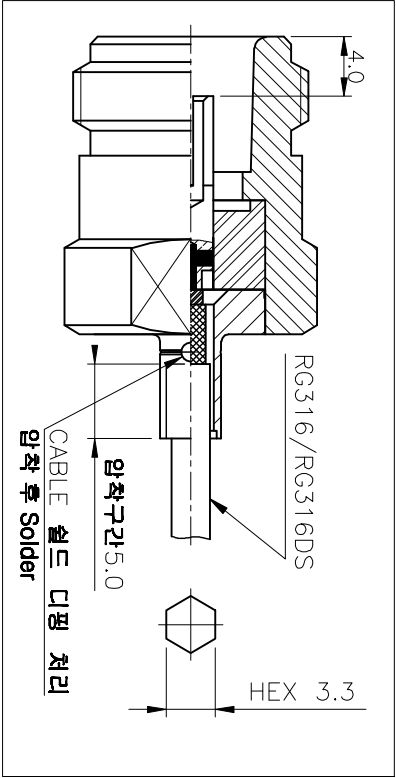

ASSY/별 것.	4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	ø4-20mm Black
	3	CONNECTOR	1	KJ COMTECH	CN00882-7/1	SMA50 PS
	2	CONNECTOR	1	KJ COMTECH	CN0848-7/1	N50 PS
	1	CABLE		EXPANTEL	ACA00048-N/1	RG316(50Ω) (BROWN)
CUSTOMER	NO.	DESCRIPTION	QTY	VENDER	PART NO.	REMARKS
CUSTOMER CODE	DATE		2019. 08. 27.			
	APPROVED BY		I.C.KIM			
	CHECKED BY					
CABLE LENGTH TOLERANCE	DRAWN BY		S.Y.EJUN			
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
TITLE				CABLE ASS'Y		
 KJ COMTECH CO.,LTD.				RF & MICROWAVE TECHNOLOGY TEL : 02-26-947-3015 FAX : 02-26-947-3017		
DWG NO.		CF01387-7/1				
DETAIL NO.						
REVISION		I R		SHEET		1 of 1

CABLE ASS'Y

DWG NO.		CF01387-7/1	
DETAIL NO.			
REVISION		SHEET 1 of 1	