



1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.35
4. INSERTION LOSS(Max) : 1.0dB

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.08.12.
1	고객사 요청으로 인한 RG178 -> RG318 변경으로 인한 계약일 및 커백일 코드변경	S.Y.EUN	I.C.KIM	2019.07.08.

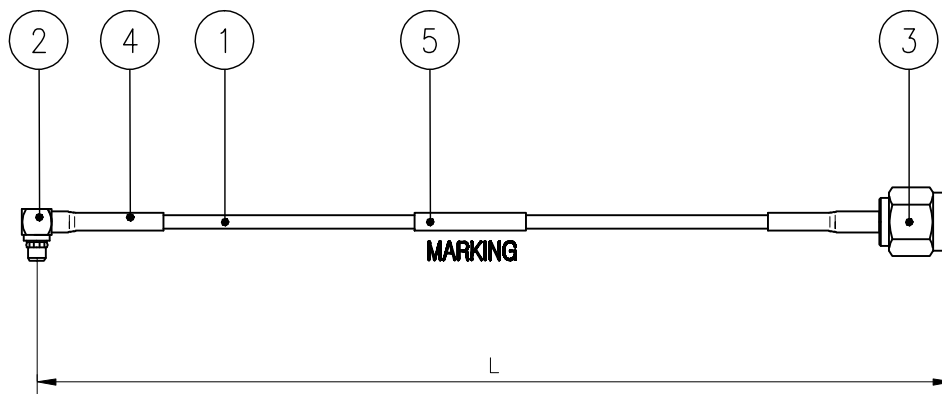

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES



- 2-1. MMCX PL-----▶▷BODY : Gold Plating
CONTACT : Gold Plating
RING : Gold Plating
- 2-2.SMA PS-----▶▷BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating



MARKING

5	MARKING TUBE	1	LS TUBE	ATU00212-N/1	ø4-15mm WHITE
4	SHRINK TUBE	2	LS TUBE	ATU00058-N/1	ø4-15 BLACK
3	CONNECTOR	1	KJ COMTECH	CN00962-7/1 CN00070-7/1	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN00012-7/3 CN00010-7/1	MMCX50 PL
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1 ACA00048-N/1	RG318(50Ω) RG178(50Ω) (BROWN)

NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE	2019. 07. 08.		 KJ COMTECH CO.,LTD.		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-3071 Fax : 82-32-347-3070
APPROVED BY	I.C.KIM				
CHECKED BY			TITLE CABLE ASSY		
DRAWN BY	S.Y.EUN				
CHECKED BY					
SCALE	UNIT		A4	DWG NO.	CF01390-7/1
N/S	mm			DETAIL NO.	
			REVISION	1	SHEET 1 of 1

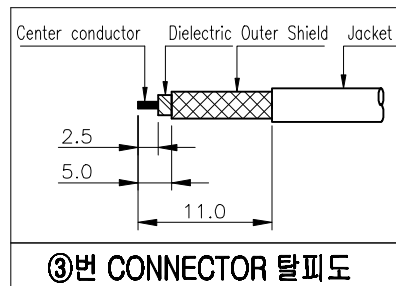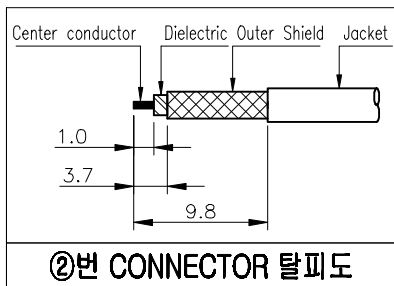

CUSTOMER
CUSTOMER CODE
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +8, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%