
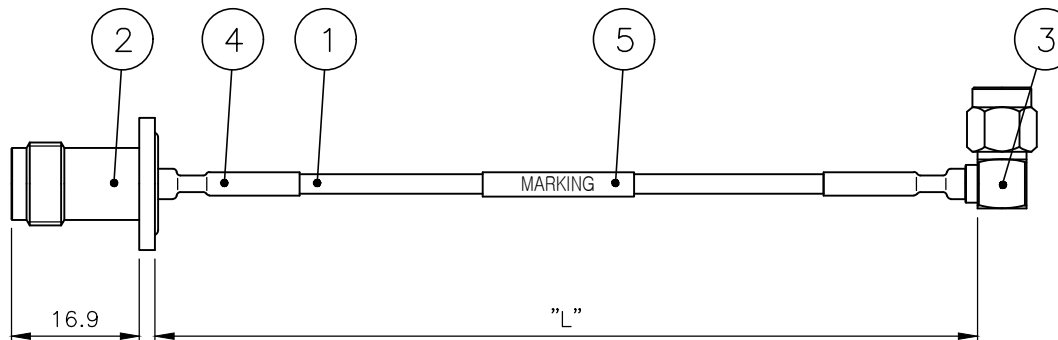


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 1.1GHz ~ 1.7GHz
3. VSWR : 1.5(Max)
4. INSERTION LOSS : 1.0dB (Max)



REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 07. 26.

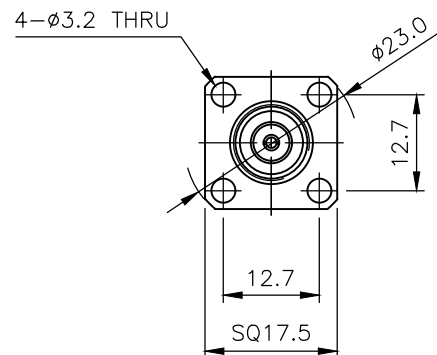

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA50 PL -->> BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. TNC50 JS-4H -->> BODY : Nickel Plating
CONTACT : Gold Plating

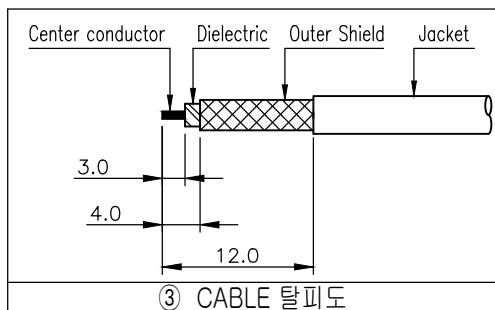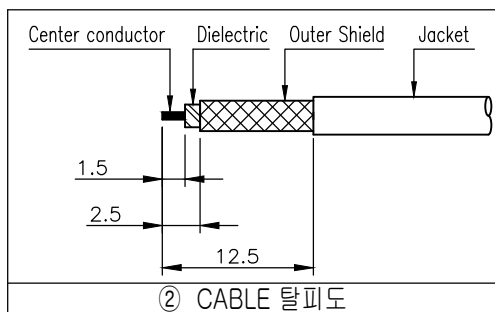

CF01401-7/1
YY-XXX

년도 S/N ex) 21-001, 21-002

MARKING

5	MARKING TUBE (방산)	1	LS TUBE	ATU00356-N/1	GSHS-1635F-Ø4-WH Ø4-15mm White
4	BONDING TUBE (방산)	2	LS TUBE	ATU00366-N/1	GSHS-3635W-Ø4-BK Ø4-15mm Black
3	CONNECTOR	1	KJ COMTECH	CN02234-7/1	TNC50 JS-4H
2	CONNECTOR	1	KJ COMTECH	CN02810-7/4	SMA50 PL
1	COAXIAL CABLE	1	EXPTEL	ACA00211-N/1	EXSF-085T-50-CW-J 85FJ(50Ω) (BLUE)

CUSTOMER		NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
		DATE	2019. 07. 26.				
CUSTOMER CODE		APPROVED BY	I.C.KIM				
		CHECKED BY					
CABLE LENGTH TOLERANCE		DRAWN BY	S.Y.EUN				
		CHECKED BY					
		SCALE	N/S	UNIT	mm	TITLE	
						CABLE ASSY	
						DWG NO.	CF01401-7/1
						DETAIL NO.	
						REVISION	I R
						SHEET	1 of 1