


* ELECTRICAL DATA


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~2.4GHz
3. VSWR : 1.2(Max)
4. INSERTION LOSS : 0.8dB(Max)

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.04.08.

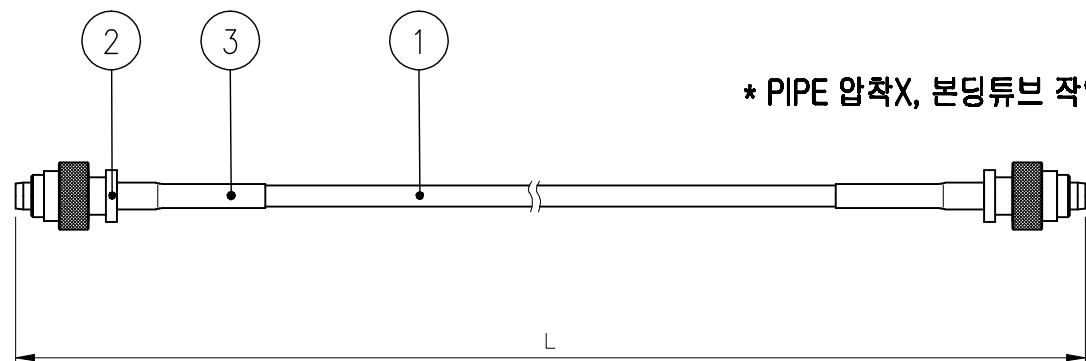

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMDL PS → BODY : Nickel Plating
CONTACT : Gold Plating
CAP: Nickel Plating

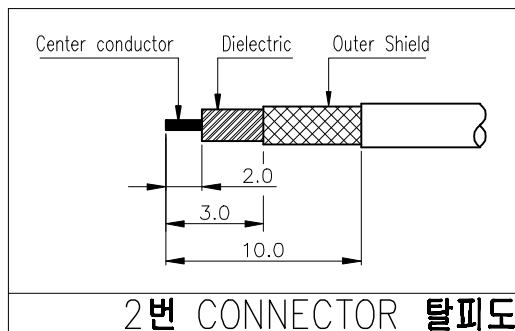

3	BONDING TUBE	2	LS TUBE	ATU00004-N/1	Ø4 - 20mm (BLACK)
2	CONNECTOR	2	KJ COMTECH	CN02814-7/4	SMDL50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00043-N/1	MF85(50Ω) (BLUE)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2019. 04. 08.				
	APPROVED BY	I.C.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE	DRAWN BY	S.Y.EUN				
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
				TITLE		
				CABLE ASS'Y		
				DWG NO.	CF01403-7/1	
				DETAIL NO.		
				REVISION	I R	SHEET 1 of 1