


CF01403-7/1

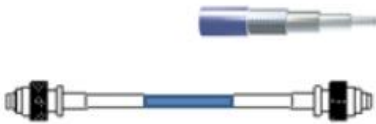

SMBL-PS+SMBL-PS
+85MF(BLUE)
SMBL PS 85MF
Solder+FERRULE CAPΦ9
BO/NI, PI/GO, CAP/NI

CF01403-7/1 400mm


Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40°C ~ 125°C

■_0.5GHz	-	1.06,	1.06,	0.20
■_1.0GHz	-	1.08,	1.08,	0.32
■_2.0GHz	-	1.04,	1.04,	0.49
■_3.0GHz	-	1.09,	1.09,	0.63
■_4.0GHz	-	1.02,	1.01,	0.72
■_5.0GHz	-	1.07,	1.07,	0.82

■_6.0GHz	-	1.38,	1.35,	1.00
■ VSWR ~5GHz	-	~1.20:1		

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- ☐ E5071B (~8.5GHz)
☒ ZND (~8.5GHz)
☐ ZVA50 (~50GHz)
- ☒ N Male to SMA Male
10GHz Cable (CF00540-7/1)
☐ N Male to N Male
10GHz Cable (CF00539-7/1)
☐ 2.4mm Male to 2.4mm Male
50GHz Cable

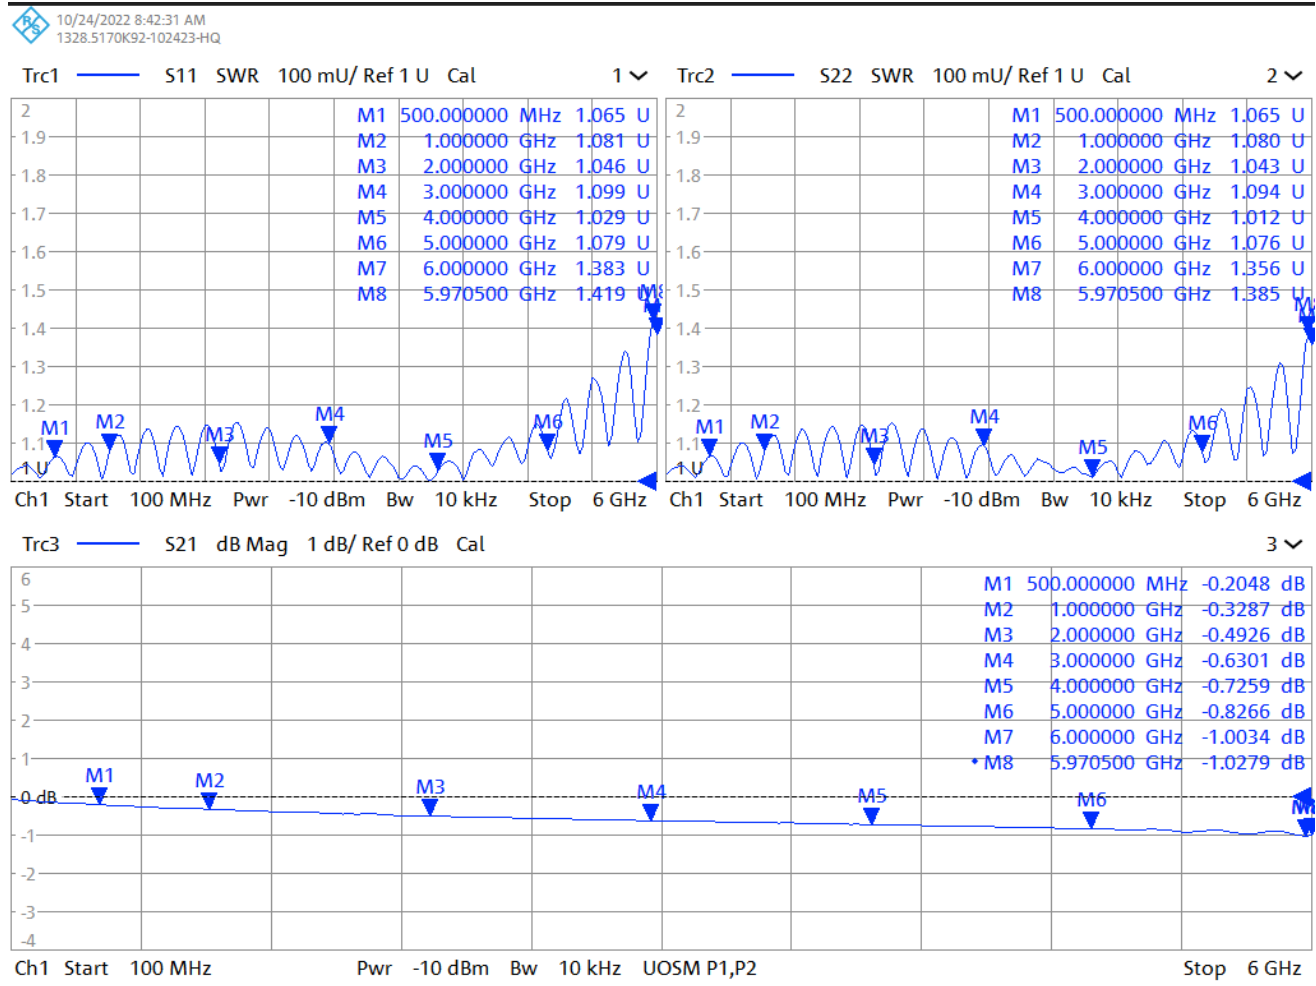

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)