


ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. VSWR (Max) : 1.2@DC~6GHz


REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.08.05.

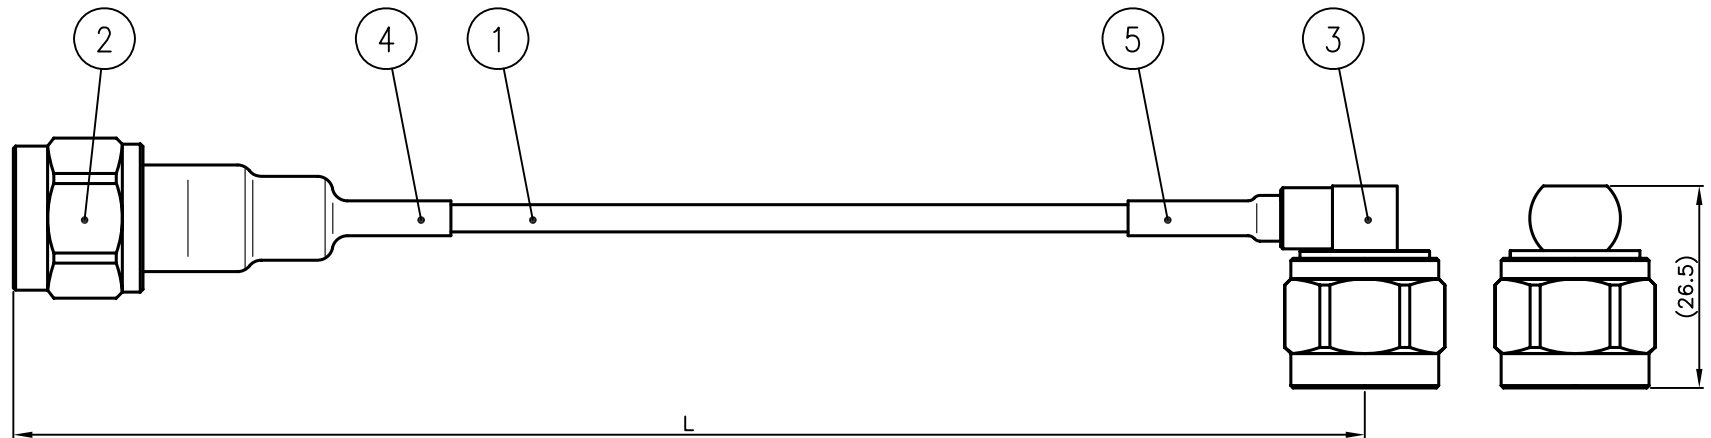


Notes


1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N PS-----▷ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. N PL-----▷ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

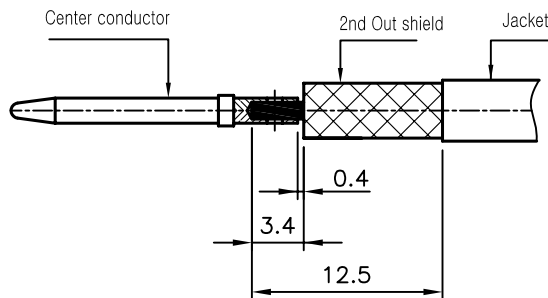

2번 CONNECTOR 탈피도

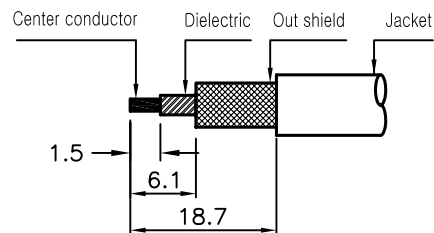

3번 CONNECTOR 탈피도

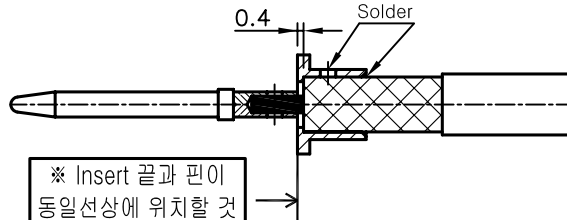

※ Insert 끝과 핀이
동일선상에 위치할 것

N Type ST 케이블 심선+핀 조립

5	BONDING TUBE	1	LS TUBE	ATU00012-N/1	Ø12-20mm-BLACK
4	BONDING TUBE	1	LS TUBE	ATU00012-N/1	Ø12-60mm-BLACK
3	CONNECTOR	1	KJ COMTECH	CN02889-7/1	N50 PL
2	CONNECTOR	1	KJ COMTECH	CN01262-7/4	N50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Ω)-BLUE
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

DATE		2019. 08. 05.		 COMTECH KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
APPROVED BY		I.C.KIM			
CHECKED BY				TITLE CABLE ASS'Y	
DRAWN BY		S.Y.EUN			
CHECKED BY					
SCALE		UNIT		A4	
N/S		mm			
					
				DWG NO. CF01407-7/1	
				DETAIL NO.	
				REVISION	
				I R	
				SHEET 1 of 1	