


A schematic diagram of a beam element of length L . The beam is represented by a horizontal line with a cross-hatched pattern. Four nodes are marked along the beam: Node 3 is at the left end, Node 4 is at the midpoint, Node 1 is at the right end, and Node 2 is at the right end, slightly offset from Node 1. The nodes are labeled with numbers 1, 2, 3, and 4 in circles. The length L is indicated below the beam.

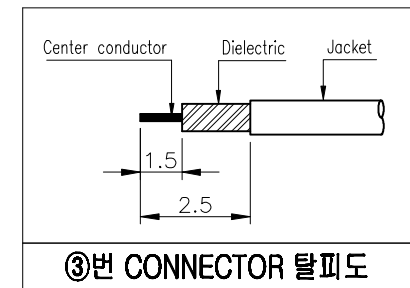

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2019. 08. 12.			 RF & MICROWAVE TECHNOLOGY Tel : 82-92-947-0015 Fax : 82-92-947-0917			
CUSTOMER CODE	APPROVED BY	I.C.KIM		 TITLE CABLE ASS'Y			
	CHECKED BY						
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN		A4 DWG NO. CF01411-7/1 DETAIL NO. REVISION 1 R SHEET 1 of 1			
	CHECKED BY						
	SCALE	UNIT					
	N/S	mm					