


ELECTRICAL DATA * 작업 후 실측 DATA 기준으로 기재 예정

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 2.4GHz~5.8GHz
3. VSWR (Max) :
4. INSERTION LOSS(Max) :


REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.10.02.

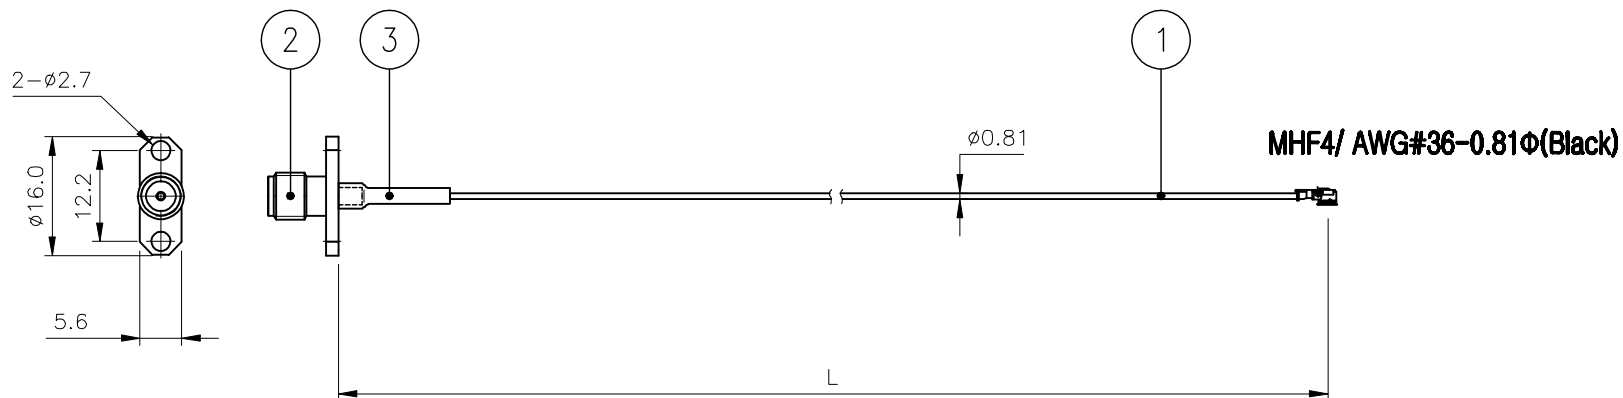

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA JS-2H ----->> BODY : Nickel Plating
CONTACT : Gold Plating

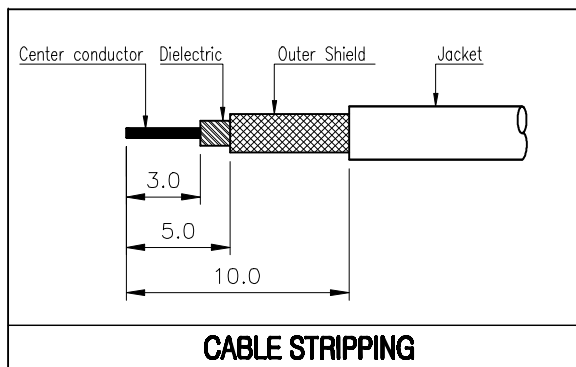

3	BONDING TUBE	1	LS TUBE	ATU00003-N/1	φ3-15mm (Black)
2	CONNECTOR	1	KJ COMTECH	CN03442-7/2	SMA50 JS-2H
1	COAXIAL CABLE	1	I-PEX	ACA00458-N/2	MHF4-0.81φ (BLACK)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2019. 10. 02.		
CUSTOMER CODE			APPROVED BY I.C.KIM		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 50mm : +0.5 ~ -0.5			DRAWN BY S.Y.EUN		
50 ~ 200mm : +1.0 ~ -1.0			CHECKED BY		
100 ~ 500mm : +2.0 ~ -2.0			SCALE		
200 ~ 500mm : +3.0 ~ -3.0			UNIT		
Bending Angles : -1.0, ~ -3.0.			1/1		
			TITLE		
			CABLE ASS'Y		
			DWG NO. CF01425-7/1		
			DETAIL NO.		
			REVISION I R SHEET 1 of 1		