


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 10. 16.
1	쇼트방지, COVER 이탈, 억지끼움 개선으로 인한 커넥터 변경	S.Y.EUN	I.C.KIM	2020. 10. 26.

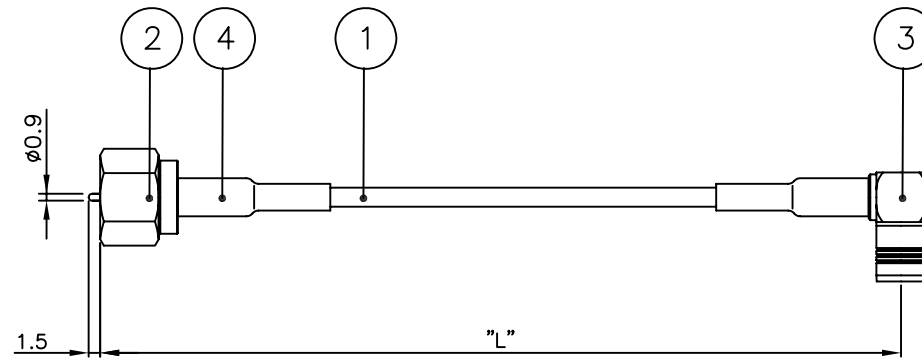

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. F75 PS -----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. SMB75 PL -----▶▷BODY : Gold Plating
CONTACT : Gold Plating
CAP : Gold Plating

Center conductor	Dielectric	Outer Shield	Jacket
2.0	5.3	9.5	
NO.2 Conn CABLE STRIP			
Center conductor	Dielectric	Outer Shield	Jacket
1.0	5.5	10.5	
NO.3 Conn CABLE STRIP			

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	ø4 - Black
3	CONNECTOR	1	KJ COMTECH	CN02945-7/1	SMB75 PL
2	CONNECTOR	1	KJ COMTECH	CN02312-7/5 CN04090-7/1	F75 PS
1	COAXIAL CABLE		EXPANTEL	ACA00052-N/1	RG179 (75Ω)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2020. 10. 26.		
CUSTOMER CODE			APPROVED BY I.C.KIM		
CABLE LENGTH TOLERANCE			CHECKED BY		
0 ~ 50mm : +0.5 ~ -0.5			DRAWN BY S.Y.EUN		
50 ~ 200mm : +1.0 ~ -1.0			CHECKED BY		
100 ~ 500mm : +2.0 ~ -2.0			SCALE		
200 ~ 500mm : +3.0 ~ -3.0			UNIT mm		
Bending Angles : -1.0° ~ -3.0°			N/S		
			TITLE		
			CABLE ASS'Y		
			DWG NO. CF01432-7/1		
			DETAIL NO.		
			REVISION 1 SHEET 1 of 1		