

CF01446-7/1
~12GHz
SMA-PL+SMA-PL
+85MF(BLUE)
SMA PL 85F Solder ONE/BODY
V:15.2mm
BO/Go Pl/Go CAP/BR/NI

CF01446-7/1 0.6M	
Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40℃ ~ 125℃

0.6M - S11/S22/S21 (SWR, SWR, dB)	
☒ _2GHz	1.02, 1.02, 0.5
☒ _4GHz	1.03, 1.02, 0.8
☒ _6GHz	1.05, 1.05, 1.0
☒ _7GHz	1.05, 1.06, 1.1
☒ _8GHz	1.00, 1.02, 1.2
☒ _9GHz	1.02, 1.02, 1.3
☒ _10GHz	1.04, 1.05, 1.4
☒ _11GHz	1.04, 1.04, 1.4
☒ _12GHz	1.13, 1.12, 1.6

▶ NETWORK ANALYZER

- ☐ E5071B (~8.5GHz)
- ☒ ZVA50 (~50GHz)


▶ Test cable

- ☐ N Male to SMA Male
10GHz Cable (CF00540-7/1)
- ☐ N Male to N Male
10GHz Cable (CF00539-7/1)
- ☒ 2.4mm Female to 2.4mm Male

▶ Test Adaptor

- ☒ 2.4mm Female to 2.92mm Male
(KJ Code : AD00646-7/2_ / 2ea)
- ☒ 2.92mm Female to 2.92mm Female
(KJ Code : AD00644-7/2_ / 2ea)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

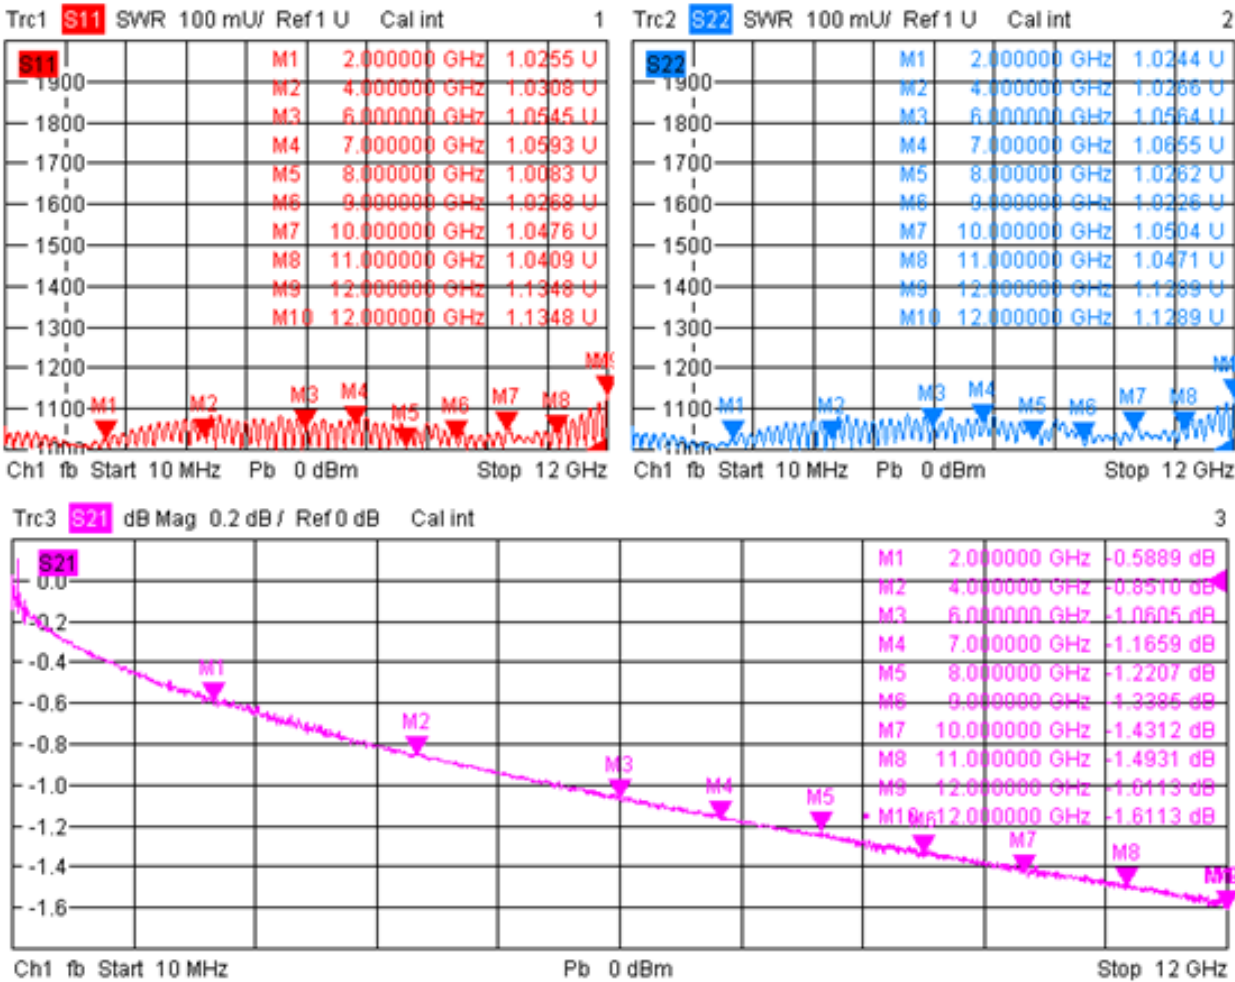

11/12/2019, 6:17 PM