

★ 양단 110mm 작업하여 특성 확인 후 절단할 것



* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : 3.4GHz~3.9GHz

V.S.W.R (Max.) : 1.35

* PIPE 압착 후 커넥터 핀땜 과납 → 보호절연체 조립하여 측정할 것

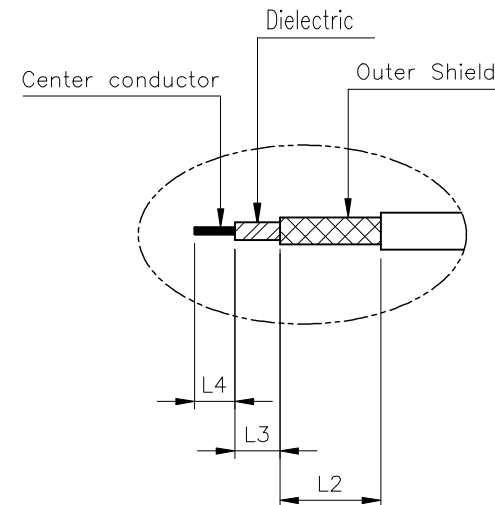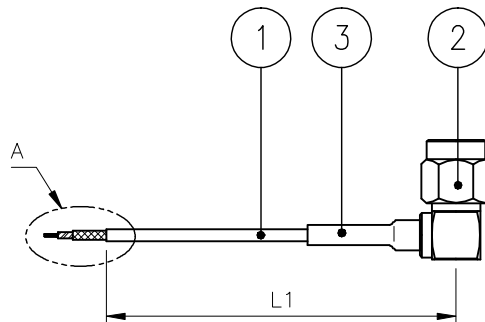


Detail "A"

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. SMA PL -----> BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

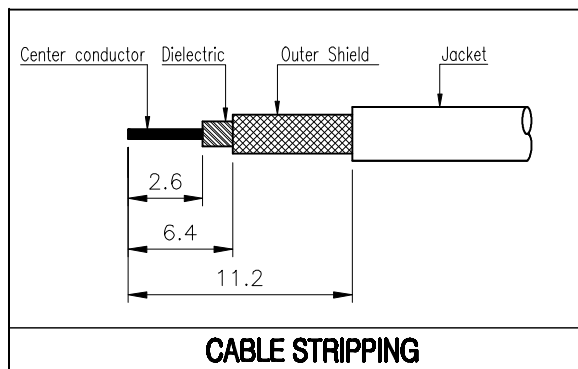

CABLE STRIPPING

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.11.11.

3	BONDING TUBE	1	LS TUBE	ATU00004-N/1	ø4-10mm (Black)
2	CONNECTOR	1	KJ COMTECH	CN08408-7/1	SMA50 PL
1	COAXIAL CABLE		EXPANTEL	ACA00046-N/1	RG178

CUSTOMER		NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
		DATE		2019. 11. 11.			
CUSTOMER CODE		APPROVED BY		I.C.KIM			
CABLE LENGTH TOLERANCE		CHECKED BY					
		DRAWN BY		S.Y.EUN			
		CHECKED BY					
		SCALE		UNIT		TITLE	
		1/1				CABLE ASS'Y	
						A4	
						DWG NO. CF01448-7/1	
						DETAIL NO.	
						REVISION I R	
						SHEET 1 of 1	

CABLE LENGTH TOLERANCE
 0 ~ 50mm : +0.5 ~ -0.5
 50 ~ 200mm : +1.0 ~ -1.0
 100 ~ 500mm : +2.0 ~ -2.0
 200 ~ 500mm : +3.0 ~ -3.0
 Bending Angle : -1.0, ~ -3.0.



RF & MICROWAVE
TECHNOLOGY
Tel : 82-82-947-8015
Fax : 82-82-947-8017