


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. VSWR : 1.25(Max)

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.11.11.
1	특성개선으로 인한 SMA 커넥터 코드 변경	S.Y.EUN	I.C.KIM	2021.07.28.

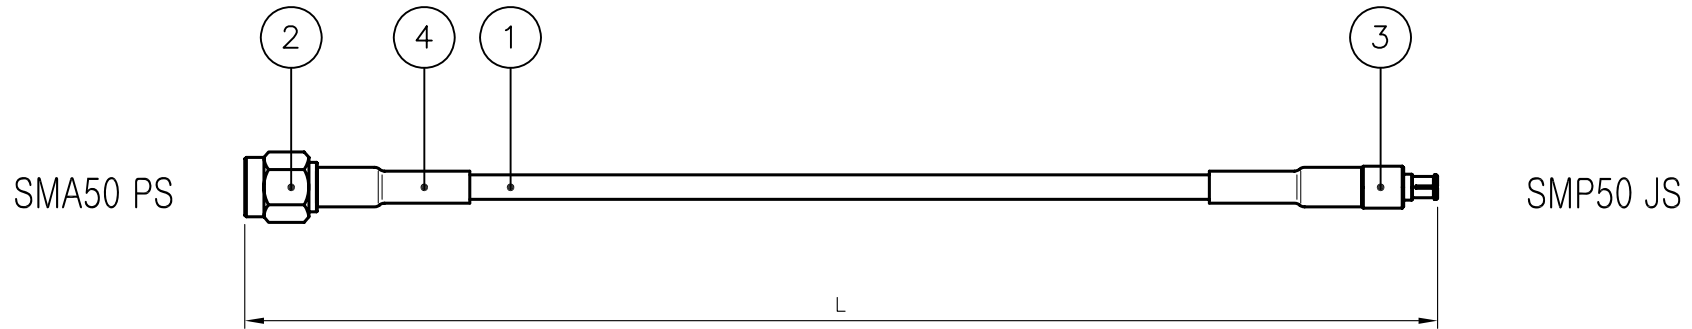

■ 고주파용 로데 ZVQ50 계측기 사용 (~50GHz)

- 측정방법

1. PORT1, PORT2 2.92mm F-F CAL 진행한다.
2. PORT1 → 2.92mm (J) 2.92mm (J) Adaptor 체결
PORT2 → SMA50 (J) SMP50 (J) Adaptor 체결하여 측정한다.
(AD00621-7/1)

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA PS-----▶ BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. SMP PS-----▶ BODY : Gold Plating
CONTACT : Gold Plating

4	BONDING TUBE	2	LS TUBE	ATU00004-N/1	Ø4-20 Black
3	CONNECTOR	1	KJ COMTECH	CN03895-7/1	SMP50 JS
2	CONNECTOR	1	KJ COMTECH	CN02796-7/D CN02796-7/A	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00043-N/1	85MF(50Ω) - BULE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2021. 07. 28.				
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE		
	DRAWN BY	S.Y.EUN		CABLE ASS'Y		
	CHECKED BY			DWG NO.		
	SCALE	UNIT		CF01449-7/1		
	N/S	mm		DETAIL NO.		
				REVISION		
				1		
				SHEET		
				1 of 1		