


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. VSWR : 1.25(Max)

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.08.27.
1				

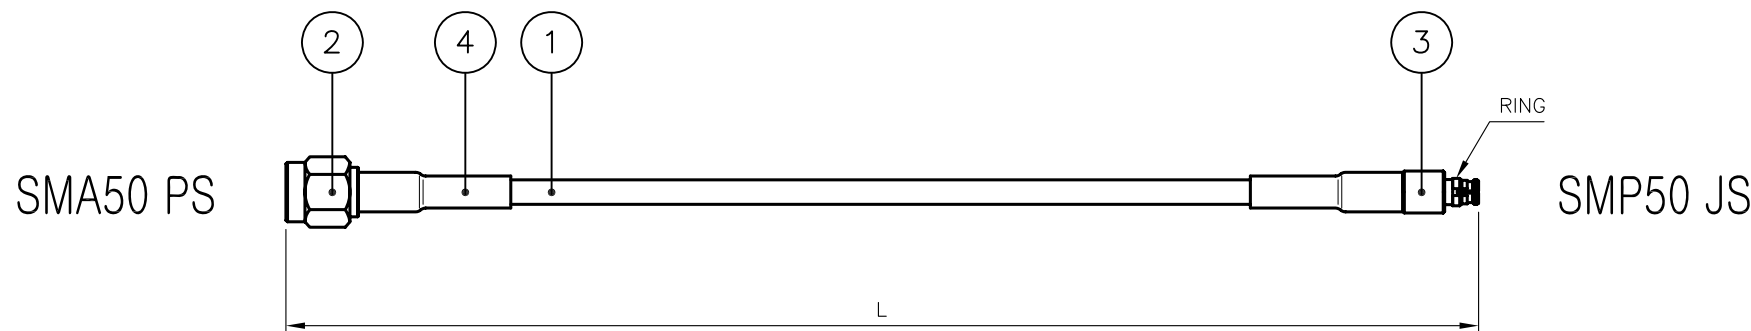

- SMP 상대물 Smooth bore Type은 적용 불가
- 고주파용 로데 ZVQ50 계측기 사용 (~50GHz)
 - 측정방법
 1. PORT1, PORT2 2.92mm F-F CAL 진행한다.
 2. PORT1 → 2.92mm (J) 2.92mm (J) Adaptor 체결
PORT2 → SMA50 (J) SMP50 (J) Adaptor 체결하여 측정한다.
(AD00586-7/1)

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA PS-----▶ BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. SMP JS-----▶ BODY : Gold Plating
CONTACT : Gold Plating

4	BONDING TUBE	2	LS TUBE	ATU00004-N/1	Ø4-20 Black
3	CONNECTOR	1	KJ COMTECH	CN03895-7/3	SMP50 JS
2	CONNECTOR	1	KJ COMTECH	CN02796-7/D	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00043-N/1	85MF(50Ω) - BULE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2021. 08. 27.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN		TITLE CABLE ASS'Y		
	CHECKED BY					
	SCALE	UNIT		A4		
	N/S	mm				
				DWG NO.	CF01449-7/2	
				DETAIL NO.		
				REVISION	I R	SHEET 1 of 1