
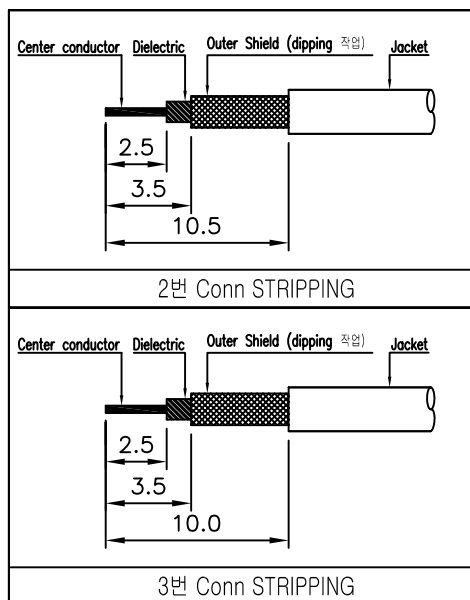


2-1. SMA JB---- ▶▷ BODY : Gold Plating
CONTACT : Gold Plating
NUT : Gold Plating
WASHER : Gold Plating

2-2. SMA PS---- ▶▷ BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

Technical drawing of a shaft assembly. The drawing shows a shaft with a central section of length L and a diameter of $\phi 1.33$. The shaft is connected to a motor on the left and a pump on the right. The motor connection is labeled with a dimension of (11.0) . The shaft is labeled with a circled number 1. The motor connection is labeled with a circled number 2. The pump connection is labeled with a circled number 3. The shaft is labeled with a circled number 4.



4	BONDING TUBE	2	LS TUBE	ATU00003-N/1	ø3-15 (Black)
3	CONNECTOR	1	KJ COMTECH	CN02954-7/1	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN00104-7/2	SMA50 JB
1	COAXIAL CABLE		SUNRIDGE	ACA00357-N/1	MCB/#54-1.33Φ (Black)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2019. 12. 03.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8011 Fax : 82-32-347-8011 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY			TITLE CABLE ASS'Y		
CABLE LENGTH TOLERANCE	DRAWN BY	S.Y.EUN				
0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			A4		
	SCALE	UNIT				
	N/S	mm		DWG NO.	CF01453-7/1	
			DETAIL NO.			
			REVISION	I R	SHEET	1 of 1