
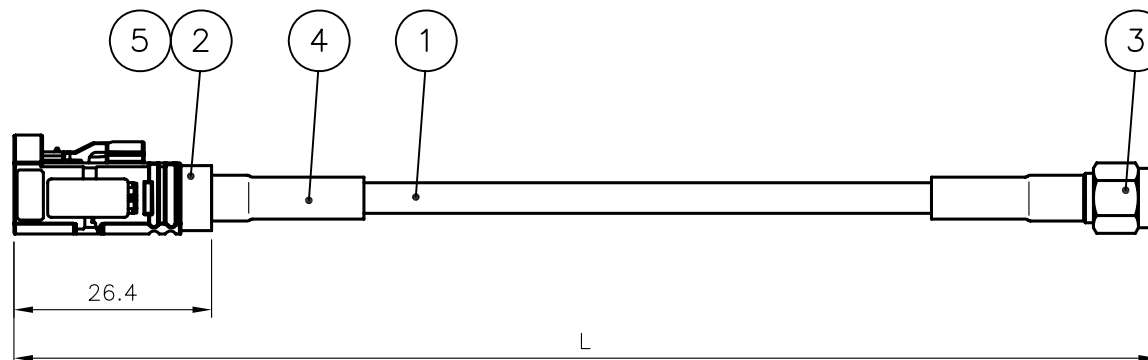


ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.3

MECHANICAL DATA :

1. TEMPERATURE RANGE : $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$






Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. FAKRA JS (Z Type)---▶▶BODY : Nickel Plating
CONTACT : Gold Plating
 - 2-2. SMA PS-----▶▶BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating



* PIN땜 작업 시 절연체 녹는 것 주의

* 케이블 은박지 쉴드 안쪽 부분 올려서 작업 할 것

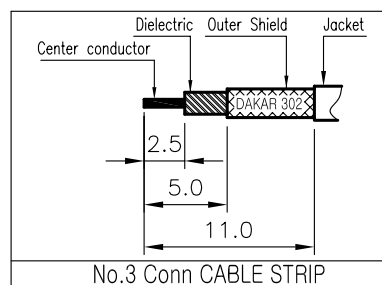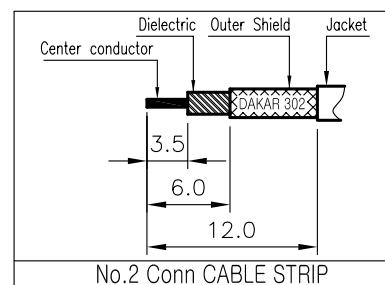

CUSTOMER

CUSTOMER CODE

CABLE LENGTH TOLERANCE

0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%

5	HOUSING	1	Rosenberger	DCU02306-N/1	Z Type				
4	SHRINK TUBE	2	LS TUBE	ATU00060-N/1	ø6-20 (Black)				
3	CONNECTOR	1	KJ COMTECH	CN00901-7/1	SMA50 PS				
2	CONNECTOR	1	Rosenberger	CN03854-N/1	FAKRA50 JS (59K130-1M4A4)				
1	COAXIAL CABLE		LEONI	ACA00467-N/1	DAKAR302 (BLACK)				
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS				
DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8011						
2020. 01. 15.									
APPROVED BY		I.C.KIM		TITLE CABLE ASS'Y					
CHECKED BY									
DRAWN BY		S.Y.EUN							
CHECKED BY									
SCALE		UNIT	A4						
N/S	mm								
			DWG NO.			CF01457-7/1			
			DETAIL NO.						
			REVISION			I R		SHEET	
								1 of 1	