


CF01459-7/1

CF01459-7/1 1M

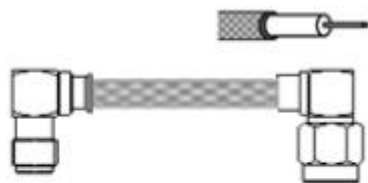

SMA-JL+SMA-PL+141F
SMA JL
BO/GO PI/GO
SMA PL
BO/Go PI/Go CAP/NI

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

1M - S11/S22/S21
(SWR, SWR, dB)

■_1.0GHz	- 1.03, 1.03, 0.41
■_2.0GHz	- 1.08, 1.06, 0.66
■_3.0GHz	- 1.09, 1.07, 0.82

■_4.0GHz	- 1.21, 1.18, 0.98
■_5.0GHz	- 1.20, 1.16, 1.09
■_6.0GHz	- 1.38, 1.33, 1.28
■_7.0GHz	- 1.34, 1.25, 1.44
■_8.0GHz	- 1.39, 1.34, 1.54

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ SMA (J) SMA (J) ST



□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

AD00006-7/2

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

CF01459

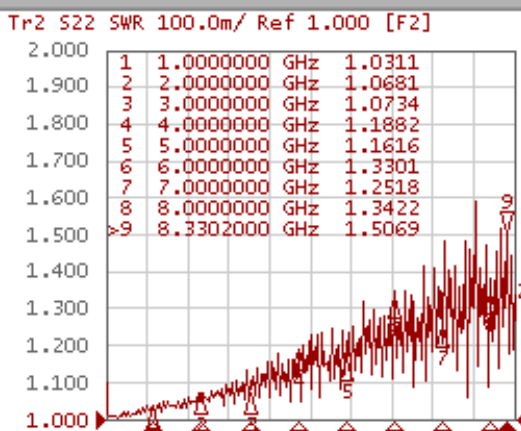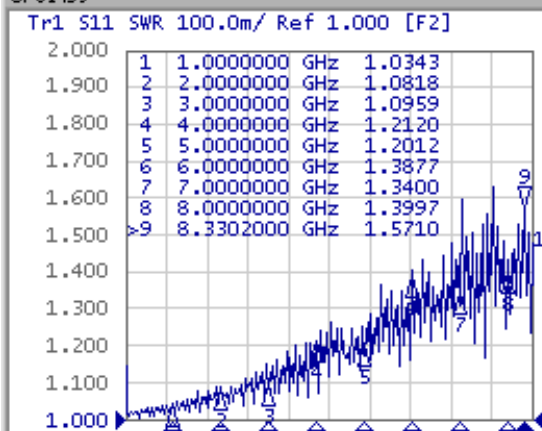

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]



1 Start 10 MHz

IFBW 70 kHz

Stop 8.5 GHz

Cor !

Meas Stop ExtRef Ready Svc

1988-01-01 03:19

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump
Screen Image...

Multipoint Test Set
Setup

Misc Setup

Backlight

ON

Firmware
Revision

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)