


CF01460-7/1

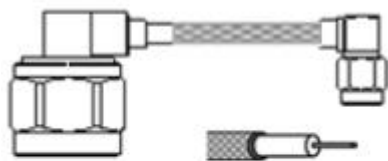

N-PL+SMA-PL+141F

N PL

BO/NI, PI/GO, CAP/NI

SMA PL

BO/Go PI/Go CAP/NI

CF01460-7/1 750mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

750mm - S11/S22/S21
(SWR, SWR, dB)

■_1.0GHz	- 1.02, 1.02, 0.33
■_2.0GHz	- 1.02, 1.02, 0.51
■_3.0GHz	- 1.03, 1.03, 0.64
■_4.0GHz	- 1.12, 1.11, 0.77
■_5.0GHz	- 1.18, 1.17, 0.87

■_6.0GHz	- 1.33, 1.32, 1.02
■_7.0GHz	- 1.34, 1.32, 1.19
■_8.0GHz	- 1.24, 1.29, 1.23

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ SMA (J) SMA (J) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

AD00006-7/2

■ N (J) SMA (J) AD00424-7/1

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

