



1. TEMPERATURE RANGE : -40° C ~ 105°C

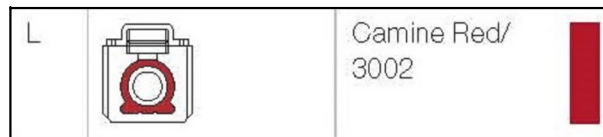


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017. 09. 12.
1	Revision for mating improvement in AMBL	S.Y.EUN	I.C.KIM	2019. 05. 27.
2	고객사 요청사항으로 인한 케이블 제조사 변경	S.Y.EUN	I.C.KIM	2019. 12. 18.
3	FAKRA Connector Rosenberger사 제품으로 변경	S.Y.EUN	I.C.KIM	2020. 01. 09.
4	AMBL CONNECTOR 방수TYPE으로 구성 변경	S.H.KIM		2023. 08. 28.

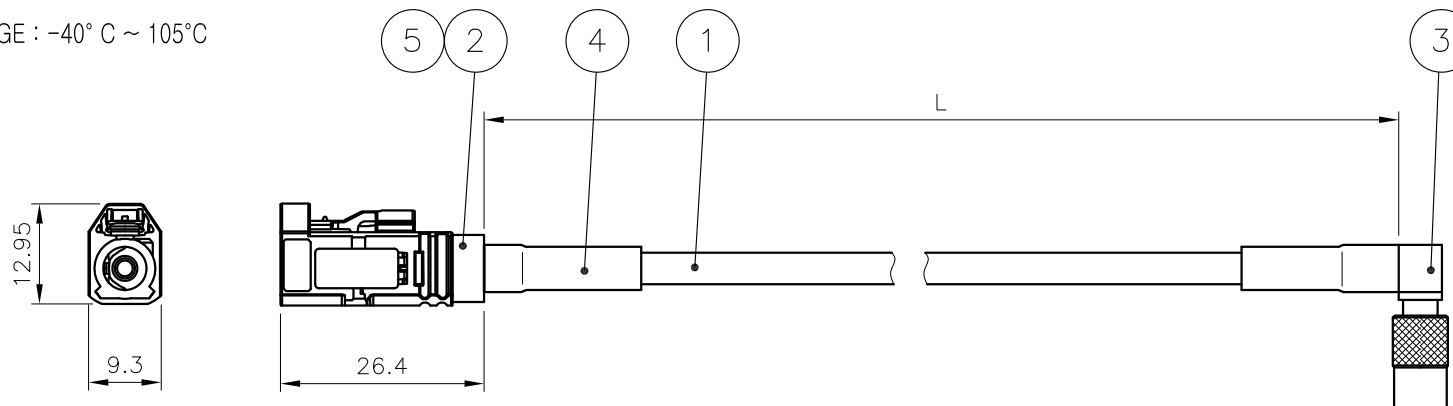

2-1. FAKRA JS (L Type)----▶▷BODY : Nickel Plating
CONTACT : Gold Plating

2-2. AMBL PL-----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Platingg

- * PIN땀 작업 시 절연체 녹는 것 주의
- * 케이블 은박지 쉴드 안쪽 부분 올려서 작업 할 것

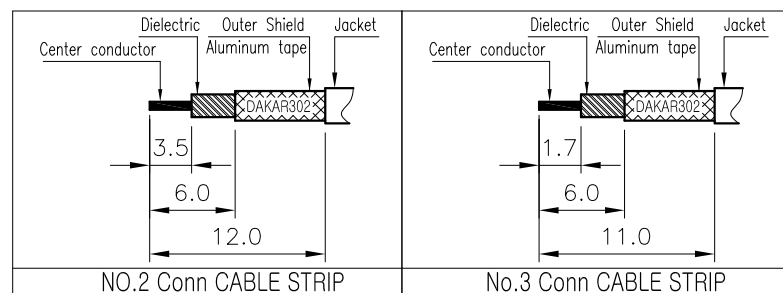

3	5	HOUSING	1	Rosenberger	DCU02306-N/2 DCU02292-N/1	L Type (59Z113-000L)
	4	SHRINK TUBE	2	LS TUBE	ATU00060-N/1	Ø6-20 (Black)
4	3	CONNECTOR	1	KJ COMTECH	CN03702-7/6 CN03702-7/3	AMBL PL
3	2	CONNECTOR	1	Rosenberger	CN03854-N/1 CN03731-7/4	FAKRA50 JS (59K130-1M4A4)
2	1	COAXIAL CABLE		LEONI COAX-PARK	ACA00467-N/3 ACA00467-N/1	DAKAR302 (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2023. 08. 28.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8011 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY			TITLE CABLE ASS'Y		
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ ~ : +10%	DRAWN BY	S.H.KIM		A4		
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
				DWG NO.	CF01468-7/1	
				DETAIL NO.		
				REVISION	4	SHEET 1 of 1