
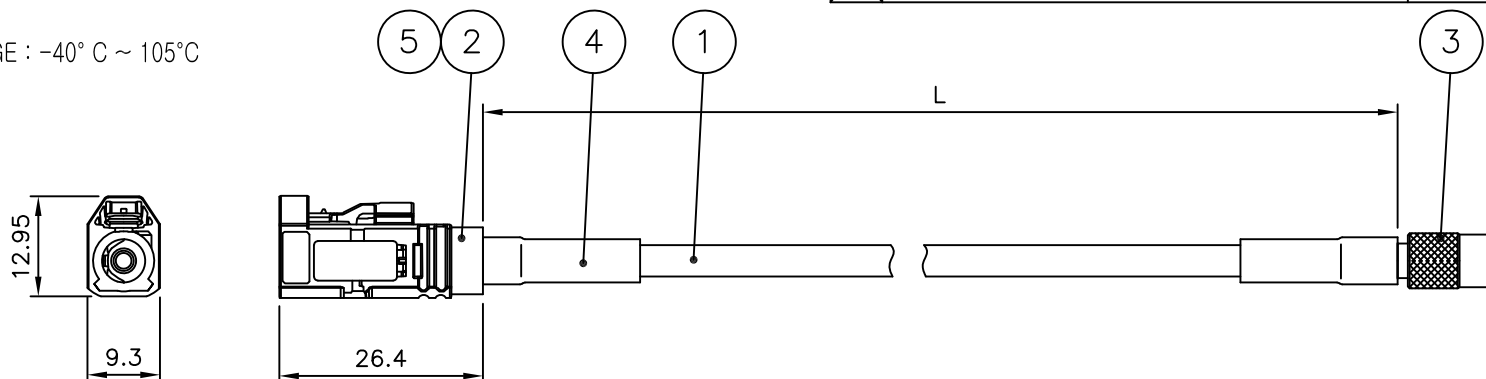


ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.3

MECHANICAL DATA :

1. TEMPERATURE RANGE : -40° C ~ 105°C

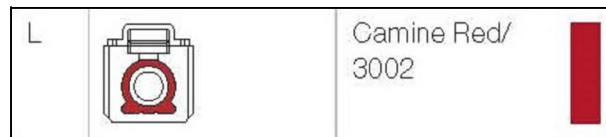

구버전	현재 FAKRA 커넥터	커넥터에 케이블 AL TAPE를 밀어넣고 HEX 4.3 사이즈로 압착
DAKAR302	AMBL 커넥터(미방수)	AL TAPE를 바디 위로 올려서 HEX3.8로 압착 진행 (재고 소진까지)
신버전	현재 FAKRA 커넥터	커넥터에 케이블 AL TAPE를 밀어넣고 HEX 4.3 사이즈로 압착
DAKAR302 0218수 5000M 입고	AMBL 커넥터(미방수)	커넥터에 케이블 AL TAPE를 밀어넣고 HEX4.3 압착 진행

▶ 상대물 체결 검사 필히 할 것


- > 상대물 CN03692-7/1 (AMBL50 PCB JB-4R)
- > 체결 후 cap의 이동이 없을 것

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

- 2-1. FAKRA JS (L Type)----▶ BODY : Nickel Plating
CONTACT : Gold Plating
- 2-2. AMBL PS-----▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

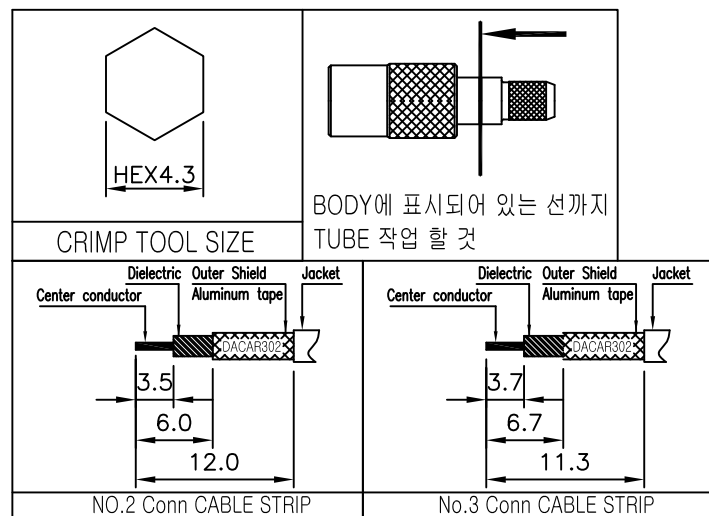

3 1		5	HOUSING	1	Rosenberger	DCU02306-N/2 DCU02282-N/1	L Type (59Z113-000L)
		4	BONDING TUBE	2	LS TUBE	ATU00006-N/1	Ø6-20 (Black)
4		3	CONNECTOR	1	KJ COMTECH	CN03691-7/4 CN03691-7/2	AMBL PS (Pin 높이 1.7)
3 1		2	CONNECTOR	1	Rosenberger	CN03854-N/1 CN03731-7/4	FAKRA50 JS (59K130-1M4A4)
2		1	COAXIAL CABLE		LEONI COAX-PARK	ACA00467-N/3 ACA00467-N/1	DACAR302 (BLACK)
		NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
		DATE			2021. 04. 22.		
		APPROVED BY					
		CHECKED BY					
		DRAWN BY		I.C.KIM			
		CHECKED BY					
		SCALE		UNIT			
		N/S		mm			
		A4					
				DWG NO.		CF01469-7/1	
				DETAIL NO.			
				REVISION		4	SHEET 1 of 1