
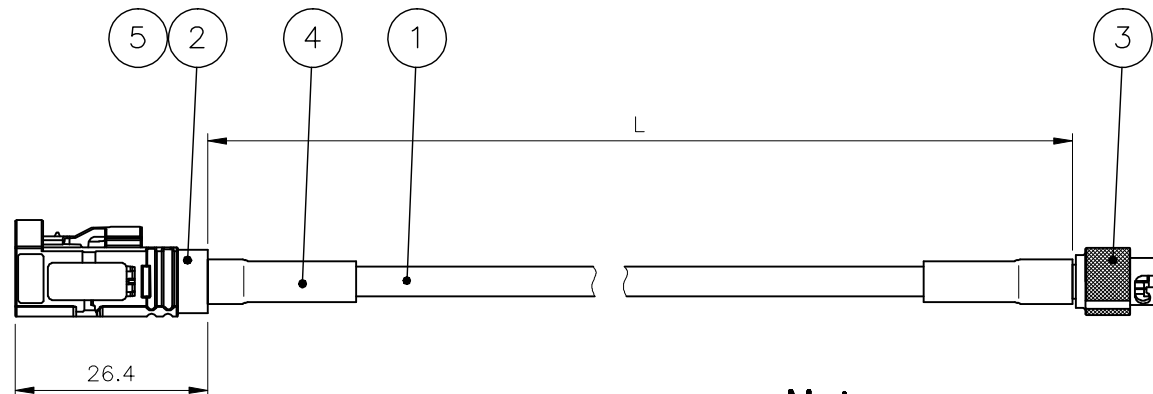


ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.3


MECHANICAL DATA :

1. TEMPERATURE RANGE : -40° C ~ 105° C



* PIN뎀 작업 시 절연체 녹는 것 주의

* 케이블 은박지 쉴드 안쪽 부분까지 올려서 작업 할 것

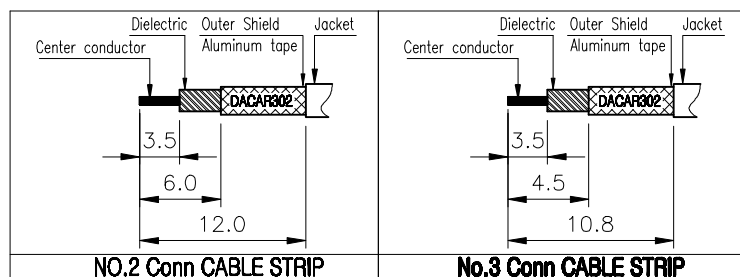

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
△IR	Initial Registration	S.Y.EUN	I.C.KIM	2017. 09. 12.
△1	FAKRA 커넥터 코드 변경 및 HOUSING 추가	S.Y.EUN	I.C.KIM	2018. 01. 15.
△2	고객사 요청사항으로 인한 케이블 제조사 변경	S.Y.EUN	I.C.KIM	2019. 12. 18.
△3	FAKRA Connector Rosenberger사 제품으로 변경	S.Y.EUN	I.C.KIM	2020. 01. 09.

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. FAKRA JS (M Type) → BODY : Nickel Plating
CONTACT : Gold Plating

2-2. UM BNC PS → BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

△3	△1	5	HOUSING	1	Rosenberger	DCU02308-N/3 DCU02292-N/2	M Type (592113-000M)
		4	SHRINK TUBE	2	LS TUBE	ATU00060-N/1	φ6-20 (Black)
		3	CONNECTOR	1	KJ COMTECH	CN03889-7/3	UM-BNC PS
△3	△1	2	CONNECTOR	1	Rosenberger	CN03854-N/1 CN03731-7/4	FAKRA50 JS (59K130-1M4A4)
	△2	1	COAXIAL CABLE		LEONI COAX-PARK	ACA00467-N/1 ACA00467-N/2	DACAR302 (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2020. 01. 09.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-947-0911 Fax : 82-32-947-0912		
CUSTOMER CODE	APPROVED BY	I.C.KIM			TITLE CABLE ASS'Y	
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN			A4	
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
				DWG NO.	CF01472-7/1	
				DETAIL NO.		
				REVISION	3	SHEET 1 of 1



RF & MICROWAVE
TECHNOLOGY
Tel : 02-02-047-0015
Fax : 02-02-047-0017

TITLE CABLE ASS'Y

A4 DWG NO. CF01472-7/1
DETAIL NO.
REVISION 3 SHEET 1 of 1