

ELECTRICAL DATA :



1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.3

MECHANICAL DATA :

1. TEMPERATURE RANGE : -40° C ~ 105° C



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2019. 07. 15.
1	AMBL S/T Type 커넥터 방수 Type변경	I.C.KIM		2021. 04. 22.

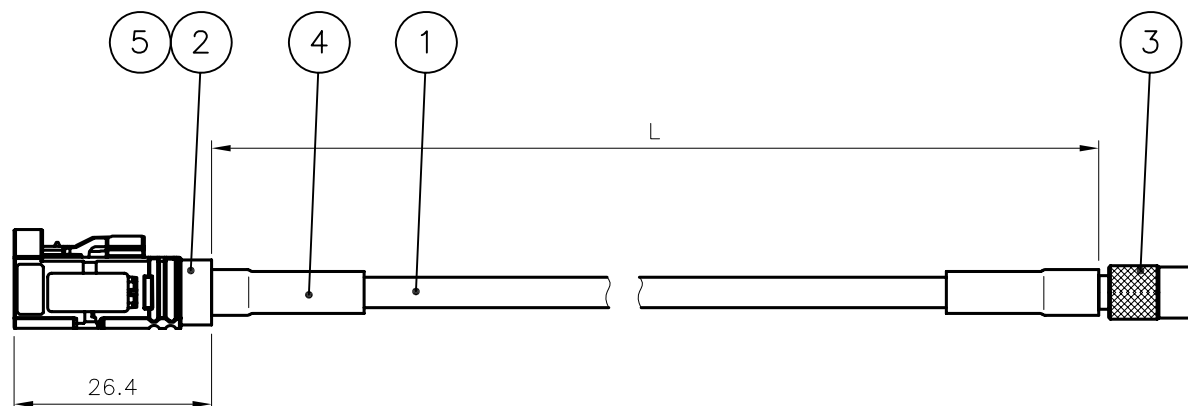

구버전	현재 FAKRA 커넥터	커넥터에 케이블 AL TAPE를 밀어넣고 HEX 4.3 사이즈로 압착
DAKAR302	AMBL 커넥터(미방수)	AL TAPE를 바다 위로 올려서 HEX3.8로 압착 진행 (재고 소진까지)
신버전	현재 FAKRA 커넥터	커넥터에 케이블 AL TAPE를 밀어넣고 HEX 4.3 사이즈로 압착
DAKAR302 0218수 5000M원고	AMBL 커넥터(미방수)	커넥터에 케이블 AL TAPE를 밀어넣고 HEX4.3 압착 진행

▶ 상대물 체결 검사 필히 할 것


- > 상대물 CN03692-7/1 (AMBL50 PCB JB-4R)
- > 체결 후 cap의 이동이 없을 것

Notes



1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

- 2-1. FAKRA JS (Z Type)----▶ BODY : Nickel Plating
CONTACT : Gold Plating
- 2-2. AMBL PS-----▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Platingg



CRIMP TOOL SIZE

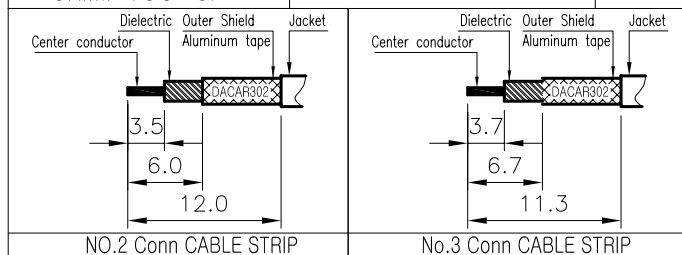BODY에 표시되어 있는 선까지
TUBE 작업 할 것

5	HOUSING	1	Rosenberger	DCU02306-N/1	Z Type
4	SHRINK TUBE	2	LS TUBE	ATU00060-N/1	ø6-20 (Black)
3	CONNECTOR	1	KJ COMTECH	CN03691-7/4 CN03691-7/4	AMBL PS (Pin 높이 1.7)
2	CONNECTOR	1	Rosenberger	CN03854-N/1	FAKRA50 JS (59K130-1M4A4)
1	COAXIAL CABLE		LEONI	ACA00467-N/3	DAKAR302-3 (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2021. 04. 22.				
CUSTOMER CODE	APPROVED BY					
	CHECKED BY					
CABLE LENGTH TOLERANCE	DRAWN BY	I.C.KIM				
	CHECKED BY					
SCALE		UNIT				
N/S		mm				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%		A4		TITLE		
				CABLE ASS'Y		
		DWG NO.		CF01473-7/1		
		DETAIL NO.				
		REVISION		1	SHEET	
					1 of 1	