

ELECTRICAL DATA :


1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : 1.5GHz~1.6GHz
3. VSWR (Max) : 1.2

MECHANICAL DATA :

1. TEMPERATURE RANGE : -40° C ~ 105°C

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020. 02. 06.

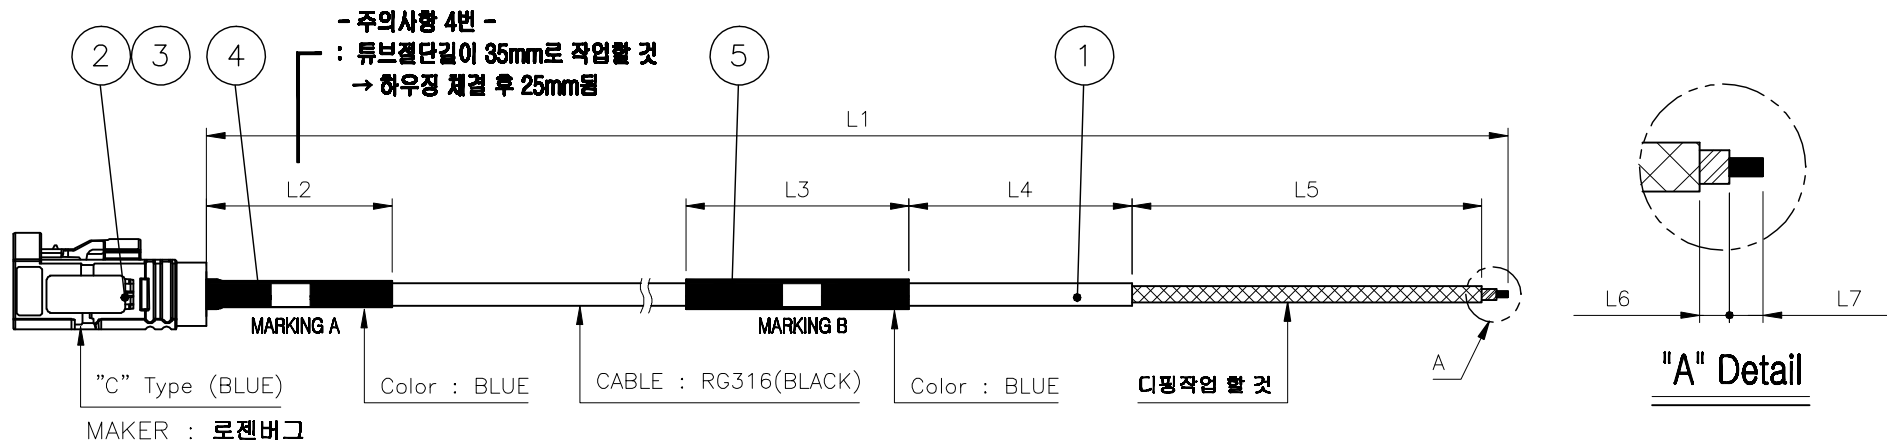


MARKING A

MARKING B

※ 주의사항 ※

1. 케이블 양단 작업 후 특성 확인
2. 커넥터 쪽 마킹튜브 작업 시 35mm로 작업할 것 (하우징 체결 후 25mm)

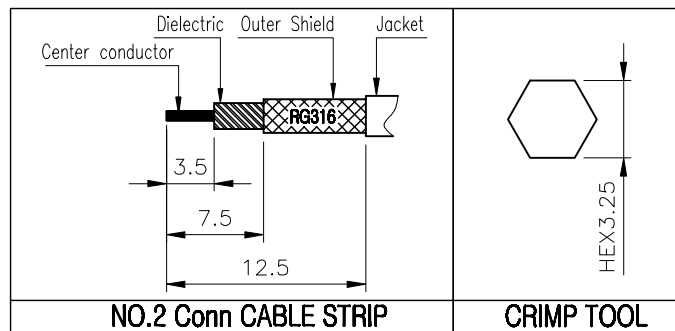

5	MARKING TUBE	1	LS TUBE	ATU00095-N/1	ø4-30mm (Blue)
4	MARKING TUBE	1	LS TUBE	ATU00095-N/1	ø4-35mm (Blue)
3	HOUSING FEMALE-C	1	Rosenberger	DCU02306-N/6	59Z063-000C (C Type)
2	BODY,PIN,BUSHING(SET)	1	Rosenberger	CN03854-N/2	59K130-102A4
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/3	RG316 (Black)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS	
	DATE 2020. 02. 06.			 RF & MICROWAVE TECHNOLOGY Tel : 82-82-947-6011 Fax : 82-82-947-6011 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE			
	DRAWN BY	S.Y.EUN					
	CHECKED BY			A4	DWG NO.	CF01477-7/1	
	SCALE	UNIT			DETAIL NO.		
	N/S	mm			REVISION	1 R	SHEET