

ELECTRICAL DATA :


1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : 800MHz~3GHz
3. VSWR (Max) : 1.2

MECHANICAL DATA :

1. TEMPERATURE RANGE : -40° C ~ 105°C

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.Y.EUN	I.C.KIM	2020. 02. 06.

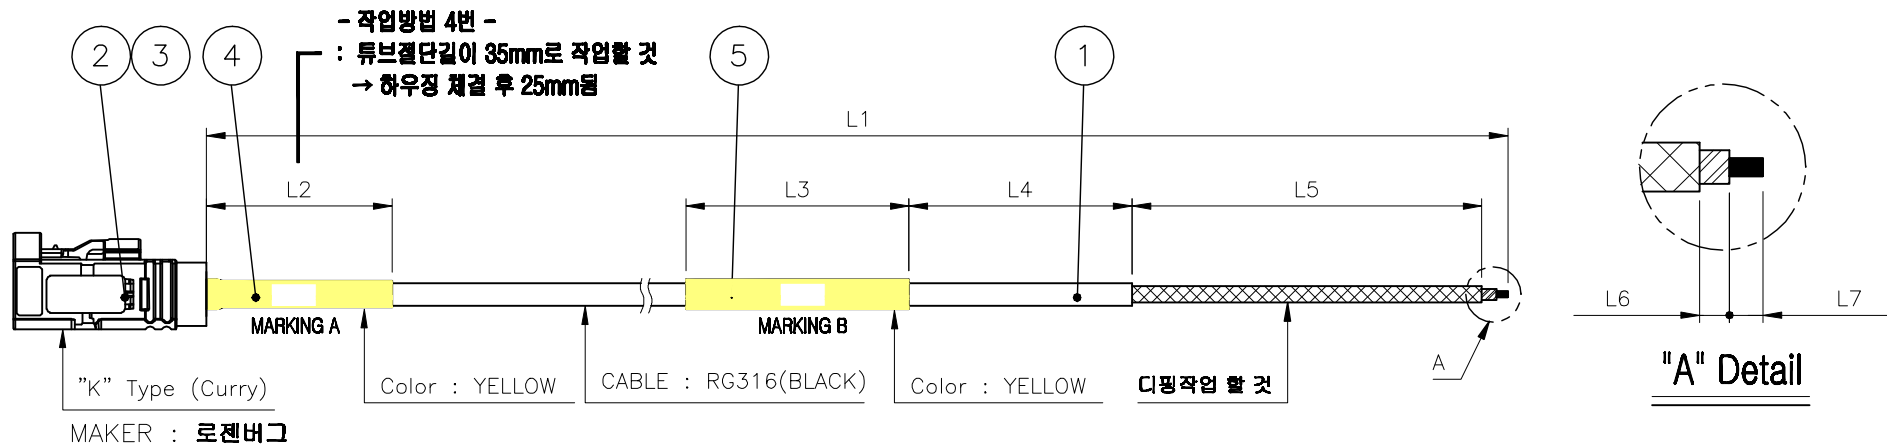


MARKING A

MARKING B

※ 주의사항 ※

1. 케이블 양단 작업 후 특성 확인
2. 커넥터 쪽 마킹튜브 작업 시 35mm로 작업할 것 (하우징 체결 후 25mm)

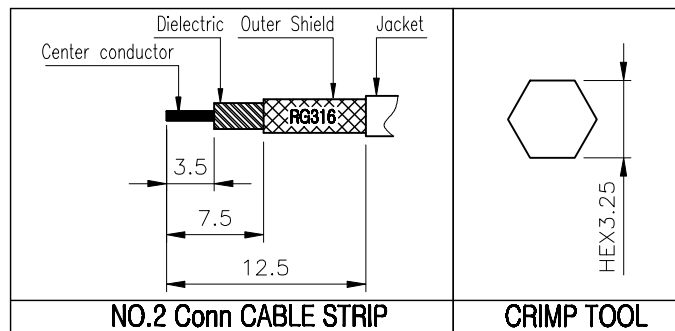

5	MARKING TUBE	1	LS TUBE	ATU00251-N/1	φ4-30mm (Yellow)
4	MARKING TUBE	1	LS TUBE	ATU00251-N/1	φ4-35mm (Yellow)
3	HOUSING FEMALE-K	1	Rosenberger	DCU02306-N/7	59Z063-000K (K Type)
2	BODY,PIN,BUSHING(SET)	1	Rosenberger	CN03854-N/2	59K130-102A4
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/3	RG316 (Black)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS								
	DATE 2020. 02. 06.			 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-82-947-8015 Fax : 82-82-947-8017										
CUSTOMER CODE	APPROVED BY	I.C.KIM												
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE										
	DRAWN BY	S.Y.EUN												
	CHECKED BY			A4 <table><tr><td>DWG NO.</td><td>CF01478-7/1</td></tr><tr><td>DETAIL NO.</td><td></td></tr><tr><td>REVISION</td><td>I R</td></tr><tr><td>SHEET</td><td>1 of 1</td></tr></table>			DWG NO.	CF01478-7/1	DETAIL NO.		REVISION	I R	SHEET	1 of 1
	DWG NO.	CF01478-7/1												
	DETAIL NO.													
REVISION	I R													
SHEET	1 of 1													
SCALE	UNIT													
N/S	mm													