

ELECTRICAL DATA :


1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : 5.8GHz~5.9GHz
3. VSWR (Max) : 1.2

MECHANICAL DATA :

1. TEMPERATURE RANGE : -40° C ~ 105°C

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.Y.EUN	I.C.KIM	2020. 02. 06.

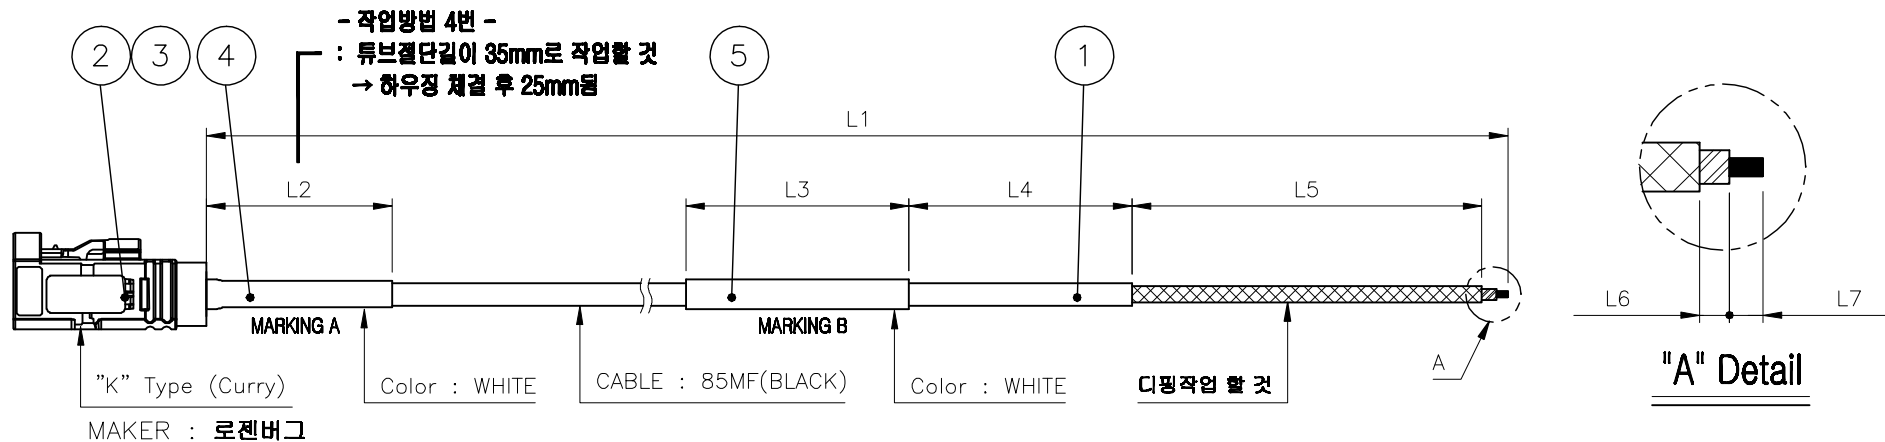


MARKING A

MARKING B

※ 주의사항 ※

1. 케이블 양단 작업 후 특성 확인
2. 커넥터 쪽 마킹튜브 작업 시 35mm로 작업할 것 (하우스징 체결 후 25mm)

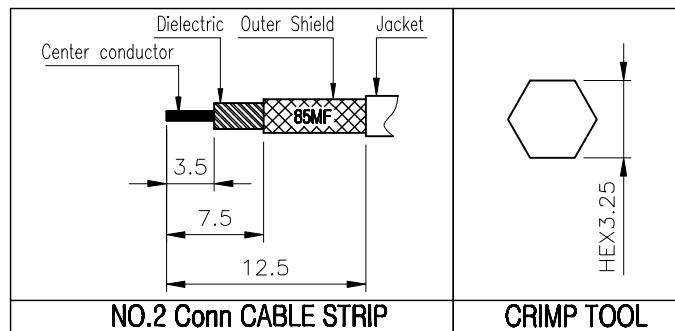

5	MARKING TUBE	1	LS TUBE	ATU00212-N/1	ø4-30mm (White)
4	MARKING TUBE	1	LS TUBE	ATU00212-N/1	ø4-35mm (White)
3	HOUSING FEMALE-K	1	Rosenberger	DCU02306-N/7	59Z063-000K (K Type)
2	BODY,PIN,BUSHING(SET)	1	Rosenberger	CN03854-N/2	59K130-102A4
1	COAXIAL CABLE		EXPANTEL	ACA00124-N/1	85MF (SS405) (Black)

CUSTOMER		NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
DATE		2020. 02. 06.					
CUSTOMER CODE		APPROVED BY		I.C.KIM			
CABLE LENGTH TOLERANCE		CHECKED BY					
0 ~ 1000mm : +5, -0		DRAWN BY		S.Y.EUN			
1000 ~ 2000mm : +10, -0		CHECKED BY					
2000 ~ 3000mm : +15, -0		SCALE		N/S			
3000 ~ 4000mm : +20, -0		UNIT		mm			
4000 ~ 5000mm : +25, -0							
5000 ~ : +10%							

KJ COMTECH
RF & MICROWAVE
TECHNOLOGY
Tel : 02-02-047-0015
Fax : 02-02-047-0017

TITLE

A4

DWG NO.
DETAIL NO.
REVISION

CF01479-7/1

SHEET 1 of 1