


CF01481-7/1

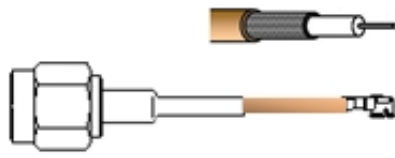

SMA-PS+MHF1
+RG178

SMA PS RG178

BO/GO, PI/GO, CH/BR/GO

CF01481-7/1 0.1M

Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40°C ~ 125°C

**0.1M - S11/S22/S21
(SWR, SWR, dB)**

■_0.5GHz	- 1.02, 1.06, 0.12
■_1.0GHz	- 1.12, 1.11, 0.19
■_1.5GHz	- 1.08, 1.10, 0.25

■_2.0GHz	- 1.23, 1.21, 0.32
■_3.0GHz	- 1.41, 1.37, 0.48
■_4.0GHz	- 1.66, 1.60, 0.70
■_5.0GHz	- 1.85, 1.79, 0.89
■_6.0GHz	- 1.77, 1.72, 0.89

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ SMA (J) SMA (J) ST
AD00006-7/2

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

■ SMA (P) UFL (P) ST
AD00336-7/1

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

