

ELECTRICAL DATA :



1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. VSWR (Max) : 1.2

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020. 01. 30.

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA50 PL-----▶ BODY : Nickel Plating
 - CONTACT : Gold Plating
 - CAP : Nickel Plating

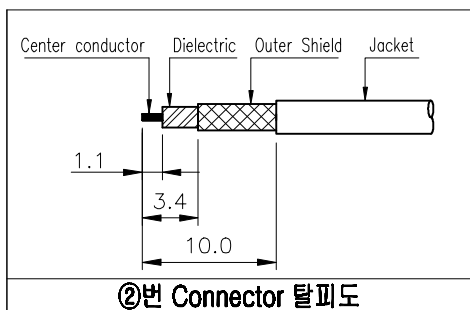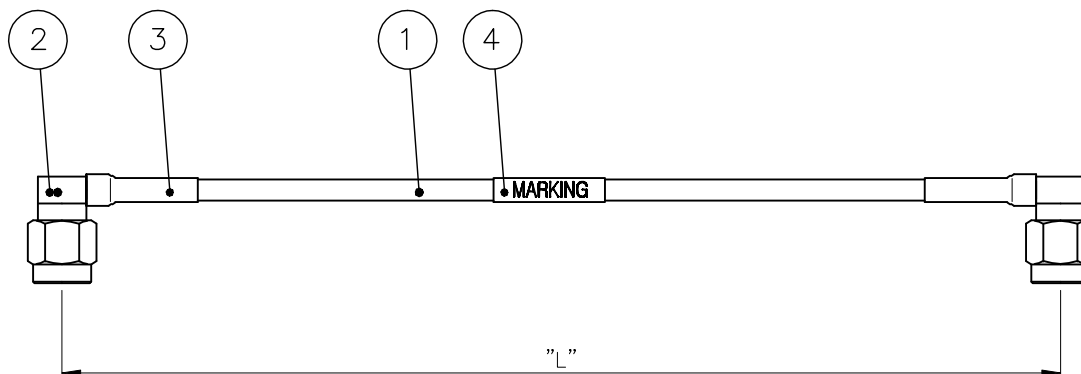

4	MARKING TUBE	1	KJ COMTECH	ATU00210-N/1	ø3-15mm (WHITE)
3	BONDING TUBE	2	KJ COMTECH	ATU00003-N/1	ø3-15mm (BLACK)
2	CONNECTOR	2	KJ COMTECH	CN00118-7/3	SMA-PL
1	COAXIAL CABLE		EXPANTEL	ACA00114-N/1	047FJ (50Ω) (CLEAR)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2020. 01. 30.		 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017		
	CUSTOMER CODE	APPROVED BY	I.C.KIM			
	CABLE LENGTH TOLERANCE	CHECKED BY		TITLE		
0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angle : -1.0° ~ -8.0°		DRAWN BY	S.Y.EUN	CABLE ASS'Y		
SCALE		CHECKED BY		DWG NO.		
N/S		UNIT	mm	CF01482-7/1		
				DETAIL NO.		
				REVISION		
				I R SHEET		
				1 of 1		