


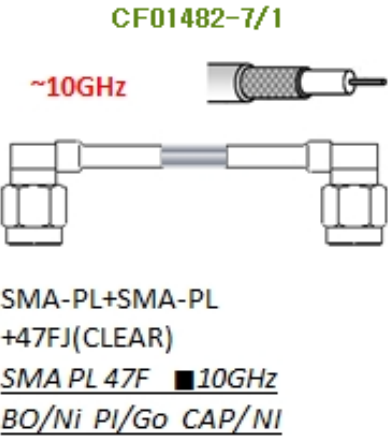

CF01482-7/1 330mm	
Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

330mm - S11,S22,S21 (dB)

■ ~10GHz
■ MAX 8.6G
1.18, 1.17, 1.54

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

□ E5071B (~8.5GHz)
■ ZVA50 (~50GHz)

■ 2.4mm Male to 2.4mm Male
50GHz Cable

■ 2.4mm (J) to 2.92mm (J)
AD00666-7/1

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

