


②번 Connector 탈피도

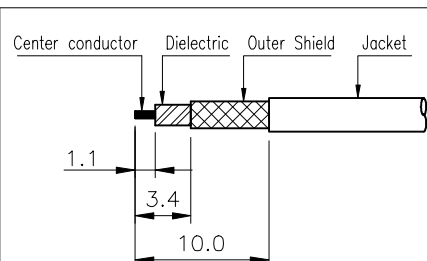

③번 Connector 탈피도

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020. 01. 30.

ELECTRICAL DATA :


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. VSWR (Max) : 1.2

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

- 2-1. SMA50 PS-----▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
- 2-2. SMA50 PL-----▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

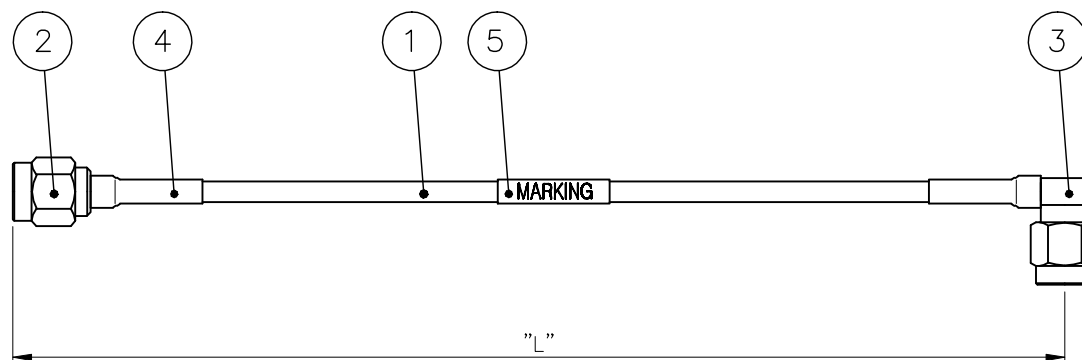

5	MARKING TUBE	1	KJ COMTECH	ATU00210-N/1	ø3-15mm (WHITE)
4	BONDING TUBE	2	KJ COMTECH	ATU00003-N/1	ø3-15mm (BLACK)
3	CONNECTOR	1	KJ COMTECH	CN00118-7/3	SMA-PL
2	CONNECTOR	1	KJ COMTECH	CN03343-7/3	SMA-PS
1	COAXIAL CABLE		EXPANTEL	ACA00114-N/1	047FJ (50Ω) (CLEAR)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2020. 01. 30.			 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
CABLE LENGTH TOLERANCE 0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angle : -1.0° ~ -3.0°	CHECKED BY			TITLE CABLE ASS'Y			
	DRAWN BY	S.Y.EUN					
	CHECKED BY			A4	DWG NO.	CF01483-7/1	
	SCALE	UNIT			DETAIL NO.		
	N/S	mm			REVISION	1	SHEET