


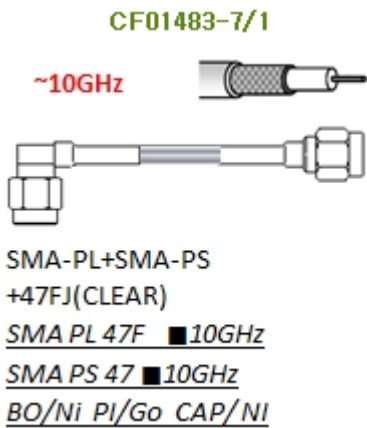

| CF01483-7/1 480mm |             |
|-------------------|-------------|
| Frequency         | ☞           |
| Insertion Loss    | ☞           |
| VSWR              | ☞           |
| Impedance         | ■ 50Ω □ 75Ω |
| Temperature       | -40℃ ~ 125℃ |

| 480mm - S11/S22/S21 (SWR, SWR, dB) |
|------------------------------------|
| ~10GHz -                           |
| ☞ MAX 9.67G                        |
| 1.26, 1.20, 2.00                   |

- ▶ NETWORK ANALYZER
- ▶ Test cable
- ▶ Test Adaptor
- ☐ E5071B (~8.5GHz)
- ☒ ZVA50 (~50GHz)
- ☒ 2.4mm Male to 2.4mm Male 50GHz Cable
- ☒ 2.4mm (J) to 2.92mm (J) AD00666-7/1

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

