


CF01484-7/1

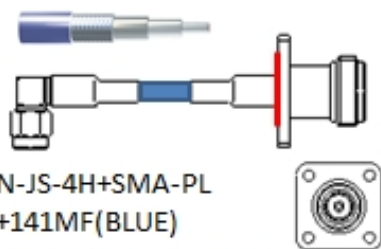

N-JS-4H+SMA-PL
+141MF(BLUE)

N JS-4H □25.4-18.2-3.2

B:17-2.5-4 BO/Ni PI/Go

SMA PL 141MF ONE/BODY

BO/Go PI/Go CAP/SUS

CF01484-7/1 165mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

165mm - S11/S22/S21
(SWR, SWR, dB)

■_1.0GHz	- 1.05, 1.04, 0.11
■_2.0GHz	- 1.06, 1.07, 0.17
■_3.0GHz	- 1.11, 1.08, 0.25
■_4.0GHz	- 1.11, 1.10, 0.30
■_5.0GHz	- 1.08, 1.09, 0.32
■_6.0GHz	- 1.36, 1.34, 0.44
■_7.0GHz	- 1.14, 1.14, 0.40
■_8.0GHz	- 1.55, 1.56, 0.63

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

■ N Male to SMA Male

10GHz Cable (CF00540-7/1)

■ SMA (J) SMA (J) ST

AD00006-7/2

■ N (P) SMA (J) Agilent사

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

